

MOTOR SUPPRESSOR

Varistor, 3x575VAC/20kW

3× 575 V AC


VDR-(1) per phase


Suppressors for other voltages, frequencies, and motor ratings available on request. Do not use RC motor suppressors with frequency inverters.

Link to Product

Illustration



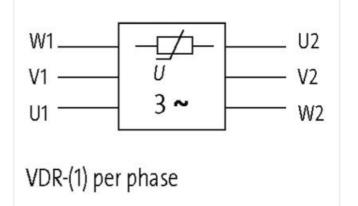

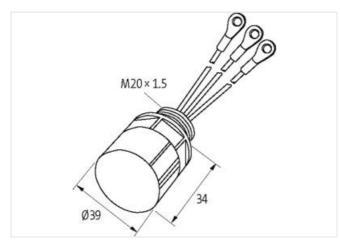

Product may differ from Image



Commercial data

ECLASS-6.0	27371013	
ECLASS-6.1	27371013	
ECLASS-7.0	27371013	
ECLASS-8.0	27371013	
ECLASS-9.0	27371013	
ECLASS-10.1	27371013	

The information in this Product-PDF has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2024-04-19

Murrelektronik Ltd. | 5 Albion Street, Pendlebury Industrial Estate, Swinton | Manchester M27 4FG | Fon +44 161 728 3133 | Fax +44 161 728 3130 | shop@murrelektronik.co.uk | shop.murrelektronik.co.uk



ECLASS-11.1	27371013
ECLASS-12.0	27371013
ETIM-5.0	EC000197
customs tariff number	85363010
GTIN	4048879019088
Packaging unit	1
Electrical data Supply	
Power frequency	10 400 Hz
Electrical data Input	
Input voltage AC	575 V
Installation	
Connection cross section max.	1 mm ²
Installation Connection	
Connection information	Single strands
Length single strands	150 mm
Ring terminals	M6isolated
Device protection Media	
Flame resistance	flame retardant
Mechanical data Material data	
Combustibility class housing (UL94)	V-0
Material housing	Plastic
Material potting compound	2-component epoxy
Mechanical data Mounting data	
Mounting method	inserted
Suitable for mounting type	Motorklemmkasten
Height	39 mm
Height Width	39 mm 39 mm
Width	39 mm
Width Depth	39 mm

The information in this Product-PDF has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2024-04-19

Murrelektronik Ltd. | 5 Albion Street, Pendlebury Industrial Estate, Swinton | Manchester M27 4FG | Fon +44 161 728 3133 | Fax +44 161 728 3130 | shop@murrelektronik.co.uk | shop.murrelektronik.co.uk