

TREE 8TX METAL - UNMANAGED SWITCH - 8 PORTS


8 port unmanaged switch  
(UL-Listed)  
Connection cables are in the online shop under "Connection Technology".

Link to Product

Illustration



Product may differ from Image

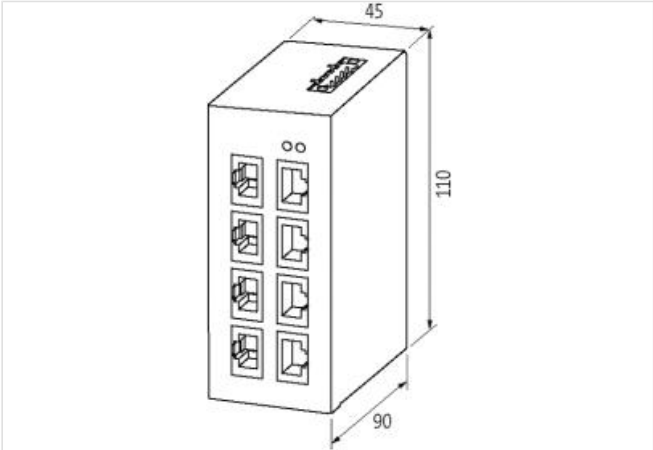

| Commercial data                                   |               |
|---------------------------------------------------|---------------|
| ECLASS-6.0                                        | 19170106      |
| ECLASS-6.1                                        | 19170106      |
| ECLASS-7.0                                        | 19170106      |
| ECLASS-8.0                                        | 19170106      |
| ECLASS-9.0                                        | 19170402      |
| ECLASS-10.1                                       | 19170402      |
| ECLASS-11.1                                       | 19170402      |
| ECLASS-12.0                                       | 19170402      |
| ETIM-5.0                                          | EC000734      |
| customs tariff number                             | 85176200      |
| GTIN                                              | 4048879439466 |
| Packaging unit                                    | 1             |
| Electrical data   Supply                          |               |
| Operating voltage DC min.                         | 9 V           |
| Operating voltage DC max.                         | 48 V          |
| Industrial communication                          |               |
| Data transmission rate max.                       | 100 MBit/s    |
| Industrial communication   Ethernet functionality |               |
| Auto-crossover                                    | yes           |
| Auto-negotiation                                  | yes           |
| duplex                                            | Full duplex   |
| Switch type                                       | unmanaged     |

VLAN unmanaged (IEEE 802.1Q)      yes

#### Diagnostics

Alarm contact      no

Diagnostic      No voltage

LED display      Ethernet connection/data traffic

#### Device protection | Electrical

Degree of protection (EN IEC 60529)      IP50

#### Mechanical data | Material data

Color housing      black

Material housing      Metal

#### Mechanical data | Mounting data

Mounting method      geschnappt

Suitable for mounting type      Mounting rail TH35, (EN 60715)

Height      110 mm

Width      45,3 mm

Depth      89,6 mm

#### Environmental characteristics | Climatic

Operating temperature min.      -10 °C

Operating temperature max.      70 °C

Storage temperature min.      -40 °C

Storage temperature max.      85 °C

#### Connection type 2

|                          |                      |
|--------------------------|----------------------|
| Connection type 1        | 8                    |
| Connection type 2        | X1                   |
| Family construction form | RJ45                 |
| Gender                   | female               |
| Color contact carrier    | black                |
| No. of poles             | 8                    |
| PIN 1                    | TD +                 |
| PIN 2                    | TD -                 |
| PIN 3                    | RD +                 |
| PIN 4                    | n.c.                 |
| PIN 5                    | n.c.                 |
| PIN 6                    | RD -                 |
| PIN 7                    | n.c.                 |
| PIN 8                    | n.c.                 |
| Connection               | Plug-in terminals RK |
| Family construction form | terminal             |
| Gender                   | male                 |
| Color contact carrier    | green                |
| No. of poles             | 5                    |
| PIN 1                    | 24 V DC (UB 2)       |
| PIN 2                    | 0 V                  |
| PIN 3                    | 24 V DC (UB 1)       |
| PIN 4                    | 0 V                  |
| PIN 5                    | PE                   |