

MSVD POWER SOCKET NEMA

Mounting rail


USA (2× NEMA 5-15) Screw terminals

Each socket can be loaded with 20 A, however, the total load of both sockets must be below 30 A.

Link to Product

Illustration



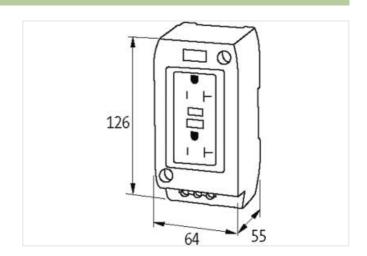

Product may differ from Image



| Commercial data | |
|---------------------------------|--------------------|
| ECLASS-6.0 | 27189217 |
| ECLASS-6.1 | 27142305 |
| ECLASS-7.0 | 27142305 |
| ECLASS-8.0 | 27142305 |
| ECLASS-9.0 | 27142305 |
| ECLASS-10.1 | 27142305 |
| ECLASS-11.1 | 27142305 |
| ECLASS-12.0 | 27142305 |
| ETIM-5.0 | EC000020 |
| customs tariff number | 85366990 |
| GTIN | 4048879041379 |
| Packaging unit | 1 |
| Electrical data Supply | |
| Operating voltage AC | 125 V |
| Operating current max. | 15 A |
| Installation | |
| Connection cross section max. | 6 mm² |
| Installation Connection | |
| Connection | Screw terminals SK |
| Mechanical data Mounting data | |
| | |



| Mounting method | geschnappt |
|----------------------------|---------------------------|
| Suitable for mounting type | mounting rail, (EN 60715) |
| Height | 126 mm |
| Width | 64 mm |
| Depth | 55 mm |