

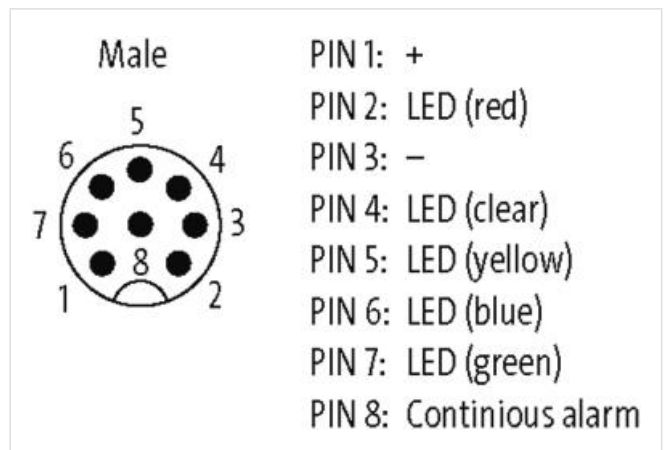
MODLIGHT70 CONNECTION MODULE 8 POLE M12 BOTTOM EXIT

Product discontinued

Basic + buzzer + flash
with M12 connection
Outlet on the bottom

[Link to Product](#)**Illustration**

Product may differ from Image

**Commercial data**

ECLASS-6.0	27371232
ECLASS-7.0	27371232
ECLASS-8.0	27371232
ECLASS-9.0	27371232
ETIM-5.0	EC001155
customs tariff number	85319000
GTIN	4048879030908
Packaging unit	1

Electrical data | Supply

Operating voltage DC	24 V
Operating voltage DC min.	21,6 V
Operating voltage DC max.	26,4 V

Device protection | Electrical

Degree of protection (EN IEC 60529)	IP65
Additional condition protection degree	inserted, locked

Mechanical data | Material data

Color housing	black
Material housing	Plastic

Mechanical data | Mounting data

Height	190 mm
--------	--------

Width	70 mm
-------	-------

Depth	70 mm
-------	-------

Environmental characteristics | Climatic

Operating temperature min.	-30 °C
----------------------------	--------

Operating temperature max.	60 °C
----------------------------	-------

Connection type 1

Family construction form	M12
--------------------------	-----

Gender	male
--------	------

Coding	A
--------	---

No. of poles	8
--------------	---

PIN 1	+
-------	---

PIN 2	LED RD
-------	--------

PIN 3	-
-------	---

PIN 4	LED CL
-------	--------

PIN 5	LED YE
-------	--------

PIN 6	LED BU
-------	--------

PIN 7	LED GN
-------	--------

PIN 8	Continuous tone
-------	-----------------