

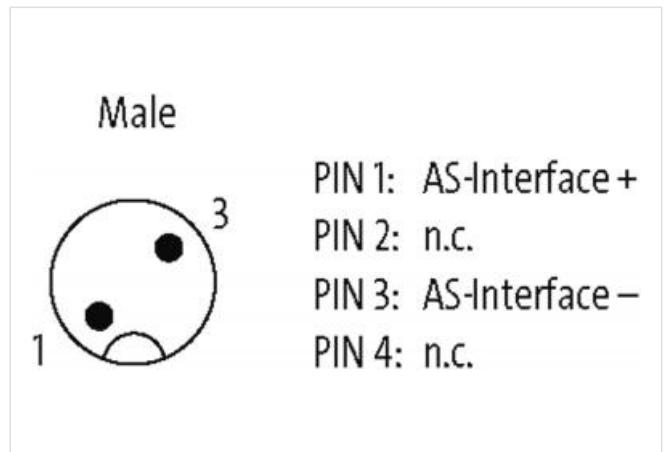
EOL - MODLIGHT70 CONNECTION MODULE 4 POLE M12 SIDE EXIT

Product discontinued, no alternative

Basic AB-Slave
4 outputs
with M12 connection
for LED modules

[Link to Product](#)**Illustration**

Product may differ from Image

**Technical Data**

| | |
|------------------------------|---|
| Bus voltage (AS-Interface) | 26.5...31.6 V DC |
| Total current (AS-Interface) | max. 20 mA |
| Addressing | via master or M12 connection and programming device |
| Address range | 1...62 (1...31 A or B) |
| Profile (IO/ID/ID2 code) | S-7.A.7 |

Output

| | |
|------------------------------|---|
| Number | 4 |
| Supply voltage | via AS-Interface |
| Switching current per output | max. 60 mA (short-circuit and overload protected) |

General data

| | |
|-------------------|-----------------------------|
| Protection | IP65 inserted and tightened |
| Connection | M12 (4-pole) |
| Housing | Black plastic |
| Dimensions H×W×D | 190×70×70 mm |
| Temperature range | -30...+60 °C |

Commercial data

| | |
|-----------------------|---------------|
| customs tariff number | 85319000 |
| GTIN | 4048879030816 |
| Packaging unit | 1 |