
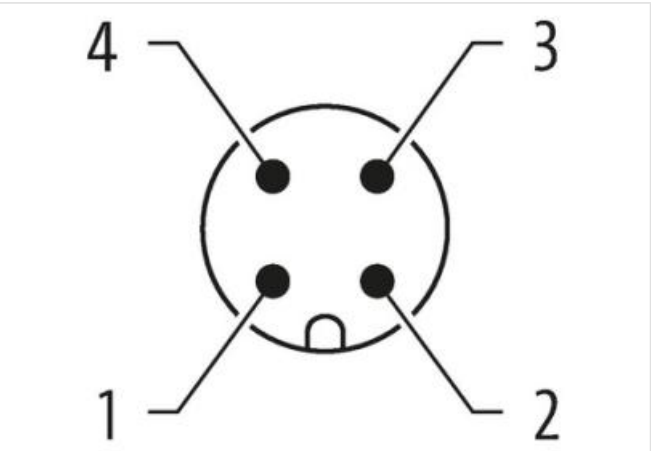


M12 MALE 0° DIAGNOSTIC PLUG DESINA


Blind plug diagnostic M12×1 mm
Bridge PIN 1 + 2

[Link to Product](#)

Illustration

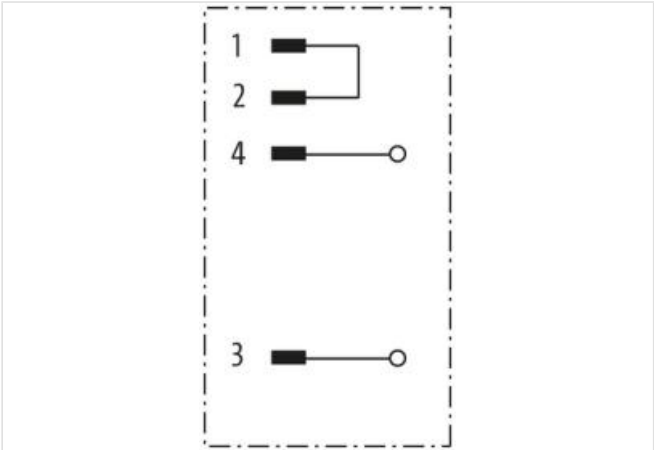

Product may differ from Image

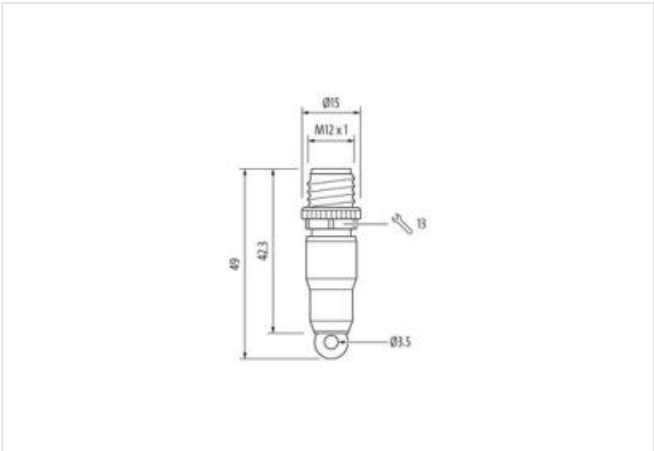

| Commercial data | |
|-----------------|----------|
| ECLASS-6.0 | 23111190 |
| ECLASS-6.1 | 27260702 |
| ECLASS-7.0 | 27440390 |
| ECLASS-8.0 | 27440190 |
| ECLASS-9.0 | 27440190 |
| ECLASS-10.1 | 27440190 |
| ECLASS-11.1 | 27440190 |
| ECLASS-12.0 | 27440190 |
| ETIM-5.0 | EC001855 |

| | |
|--|---------------------------------------|
| customs tariff number | 85366990 |
| GTIN | 4048879198745 |
| Packaging unit | 1 |
| Electrical data Supply | |
| Operating voltage AC max. | 30 V |
| Operating voltage DC max. | 30 V |
| Operating voltage AC max. (UL-listed) | 30 V |
| Operating voltage DC max. (UL-listed) | 30 V |
| Current operating per contact max. | 4 A |
| Installation Connection | |
| Tightening torque | 0,6 Nm |
| Device protection Electrical | |
| Degree of protection (EN IEC 60529) | IP67 |
| Additional condition protection degree | screwed, mounted |
| Mechanical data Material data | |
| Coating locking | Nickel |
| Locking material | Zinc die-casting |
| Mechanical data Mounting data | |
| Mounting method | inserted, screwed, Shaking protection |