

CAP BIG WITH PLUG. SPRING TERM. 21-POLE


For use with 4-,6-,8-way d-box M12 5-pole


Cap for 4-, 6-, and 8-way distribution box, 5-pole Spring clamp plug-in terminals Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.

Link to Product

Illustration



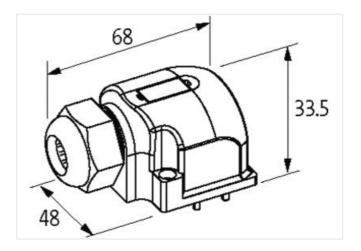

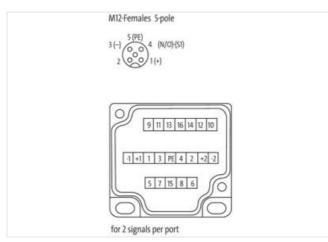

Product may differ from Image



Commercial data

ECLASS-6.0	27143423	
ECLASS-6.1	27279219	
ECLASS-7.0	27279219	
ECLASS-8.0	27279219	
ECLASS-9.0	27440108	
ECLASS-10.1	27440111	

The information in this Product-PDF has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2024-04-27

Murrelektronik Ltd. | 5 Albion Street, Pendlebury Industrial Estate, Swinton | Manchester M27 4FG | Fon +44 161 728 3133 | Fax +44 161 728 3130 | shop@murrelektronik.co.uk | shop.murrelektronik.co.uk



ECLASS-11.1	27440111
ECLASS-12.0	27440111
ETIM-5.0	EC002585
customs tariff number	85369010
GTIN	4048879300032
Packaging unit	1
Electrical data Supply	
Total current max.	8 A
Installation	
Connection cross section max.	1,5 mm ²
AWG number max.	16
Installation Connection	
Connection	Spring clamp terminals FK
Connection Device protection Media	Spring clamp terminals FK
	Spring clamp terminals FK flame retardant
Device protection Media	
Device protection Media Flame resistance	
Device protection Media Flame resistance Mechanical data Material data	flame retardant
Device protection Media Flame resistance Mechanical data Material data Material housing	flame retardant
Device protection Media Flame resistance Mechanical data Material data Material housing Environmental characteristics Climatic	flame retardant Plastic
Device protection Media Flame resistance Mechanical data Material data Material housing Environmental characteristics Climatic Operating temperature min.	flame retardant Plastic -20 °C
Device protection Media Flame resistance Mechanical data Material data Material housing Environmental characteristics Climatic Operating temperature min. Operating temperature max.	flame retardant Plastic -20 °C

The information in this Product-PDF has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2024-04-27

Murrelektronik Ltd. | 5 Albion Street, Pendlebury Industrial Estate, Swinton | Manchester M27 4FG | Fon +44 161 728 3133 | Fax +44 161 728 3130 | shop@murrelektronik.co.uk | shop.murrelektronik.co.uk