

**MOTOR SUPPRESSOR**

RC, 3x575VAC/7,5kW


3× 575 V AC

RC

Suppressors for other voltages, frequencies, and motor ratings available on request. Do not use RC motor suppressors with frequency inverters.

[Link to Product](#)

Illustration

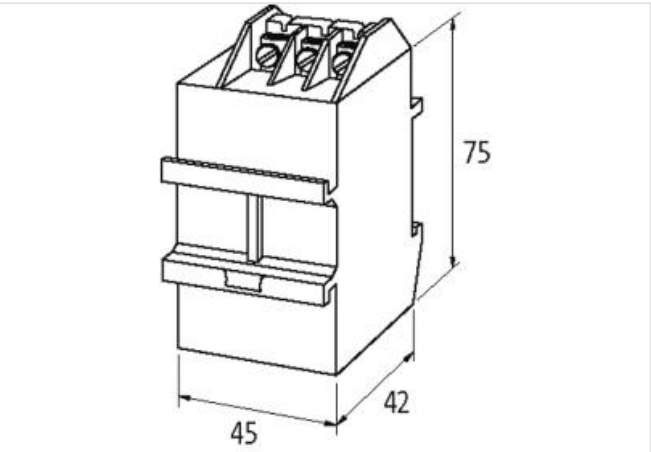

Product may differ from Image



Commercial data	
ECLASS-6.0	27371013
ECLASS-6.1	27371013
ECLASS-7.0	27371013
ECLASS-8.0	27371013
ECLASS-9.0	27371013
ECLASS-10.1	27371013

ECLASS-11.1	27371013
ECLASS-12.0	27371013
ETIM-5.0	EC000197
customs tariff number	85363010
GTIN	4048879019606
Packaging unit	1
<b>Electrical data   Supply</b>	
Power frequency	50 ... 60 Hz
<b>Electrical data   Input</b>	
Input voltage AC	575 V
<b>Installation</b>	
Connection cross-section solid min.	0,75 mm <sup>2</sup>
Connection cross-section solid max.	2,5 mm <sup>2</sup>
<b>Installation   Connection</b>	
Connection information	terminal
Family construction form	M4
<b>Installation   Pin assignment</b>	
No. of poles	3
<b>Device protection   Media</b>	
Flame resistance	flame retardant
<b>Mechanical data   Material data</b>	
Combustibility class housing (UL94)	V-0
Material housing	Plastic
Material potting compound	2-component epoxy
<b>Mechanical data   Mounting data</b>	
Height	75 mm
Width	45 mm
Depth	42 mm
<b>Environmental characteristics   Climatic</b>	
Operating temperature min.	-20 °C
Operating temperature max.	60 °C