

MOTOR SUPPRESSOR

RC, 3x400VAC/10kW

3× 400 V AC



RC

Suppressors for other voltages, frequencies, and motor ratings available on request. Do not use RC motor suppressors with frequency inverters.

For DIN-rail mounting use 2×Art.-No. 20900 adapter feet
approx. 500 mm, PVC cable 3× 0.75 mm²

Link to Product

Illustration

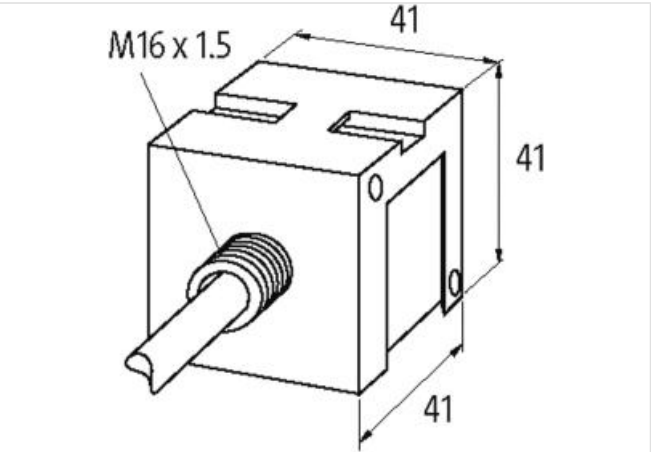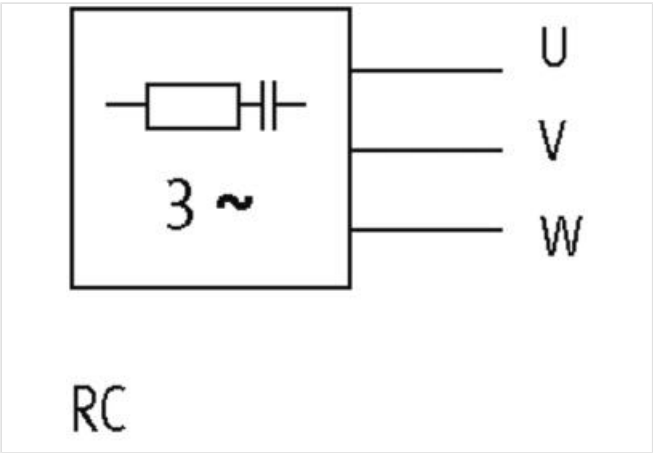

Product may differ from Image



| Commercial data | |
|-----------------|----------|
| ECLASS-6.0 | 27371013 |
| ECLASS-6.1 | 27371013 |
| ECLASS-7.0 | 27371013 |
| ECLASS-8.0 | 27371013 |

| | |
|-----------------------|---------------|
| ECLASS-9.0 | 27371013 |
| ECLASS-10.1 | 27371013 |
| ECLASS-11.1 | 27371013 |
| ECLASS-12.0 | 27371013 |
| ETIM-5.0 | EC000197 |
| customs tariff number | 85363010 |
| GTIN | 4048879019569 |
| Packaging unit | 1 |

Electrical data | Supply

| | |
|-----------------|--------------|
| Power frequency | 50 ... 60 Hz |
|-----------------|--------------|

Electrical data | Input

| | |
|------------------|-------|
| Input voltage AC | 400 V |
|------------------|-------|

Installation

| | |
|-------------------------------|----------|
| Connection cross section max. | 0,75 mm² |
|-------------------------------|----------|

Installation | Connection

| | |
|--------------------------|----------------|
| Family construction form | free cable end |
|--------------------------|----------------|

Installation | Pin assignment

| | |
|--------------|---|
| No. of poles | 3 |
|--------------|---|

Device protection | Media

| | |
|------------------|-----------------|
| Flame resistance | flame retardant |
|------------------|-----------------|

Mechanical data | Material data

| | |
|-------------------------------------|-------------------|
| Combustibility class housing (UL94) | V-0 |
| Material housing | Plastic |
| Material potting compound | 2-component epoxy |

Mechanical data | Mounting data

| | |
|----------------------------|--------------------------------|
| Mounting method | geschnappt |
| Suitable for mounting type | Mounting rail TH35, (EN 60715) |
| Height | 41 mm |
| Width | 41 mm |
| Depth | 41 mm |

Environmental characteristics | Climatic

| | |
|----------------------------|--------|
| Operating temperature min. | -20 °C |
| Operating temperature max. | 60 °C |