



MVP12, 6XM12, 5POLE, PLUGGABLE CABLE

10.0m PUR/PVC 12x0,34+5x0,75

6-way, 5-pole
 PUR/PVC
 10.0 m
 potentially separated
 with LED for digital PNP-signals 24 V DC

[Link to Product](#)

Illustration

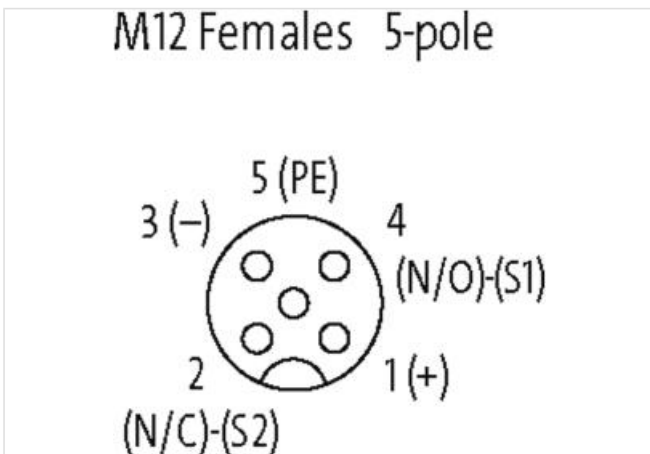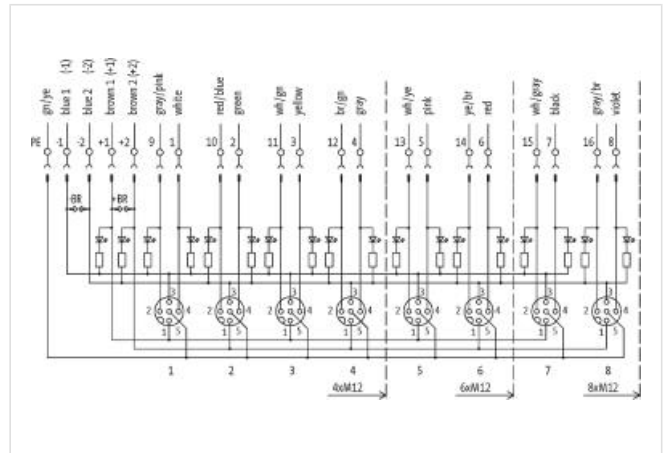

Product may differ from Image



UL
 UL

Technical Data

Operating voltage	24 V DC ±25%
Operating current per contact	max. 4 A
Protection	IP65 and IP67 when plugged and screwed down (EN 60529)
Material	PBT
Housing	Plastic, flame retardant

The information in this brochure has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-08-12

Signal per port	2
Total current	max. 2× 8 A
General data	
Temperature range	-20...+80 °C
Dimensions H×W×D	125×50.2×17 mm
Cables	
No./diameter of wires	16× 0.34 + 2× 0.75 mm ²
C-track properties	5 Mio.
Outer Ø	10.4 mm ±5%
Cable number	396
Jacket Color	gray
Temperature range (fixed)	-40...+80 °C
Temperature range (mobile)	-5...+60 °C
Bend radius (fixed)	5× outer Ø
Bend radius (moving)	10× outer Ø
Material (jacket)	PUR (UL/CSA)
Article No.	27077