
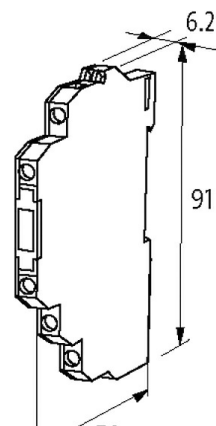
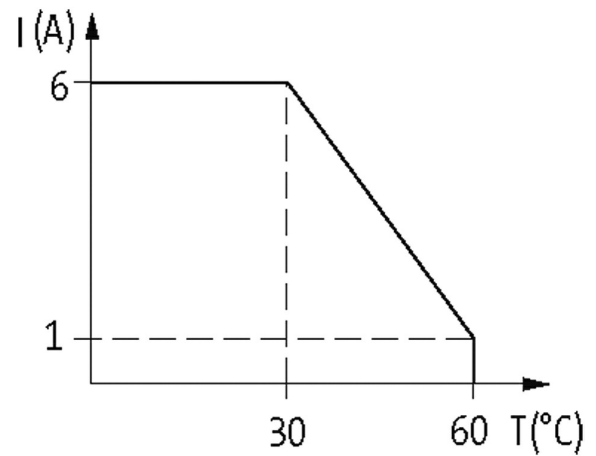
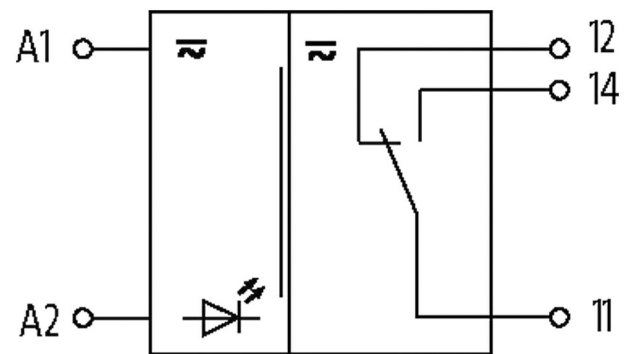


MIRO 6.2 230V-1U OUTPUT RELAY

IN: 230 VAC/DC - OUT: 250 VAC/DC / 6 A

1 NO/NC contact
6 A
230 V AC/DC
Screw terminals

[Link to Product](#)**Illustration**

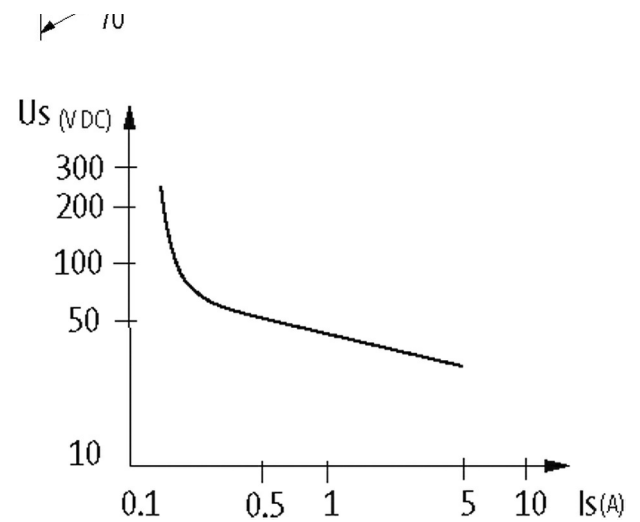

Product may differ from Image

Approvals



Input

Connection voltage - current	230 V AC/DC (195...253 V AC/DC) - 3 mA
LED display	LED (green)

Output

Switching voltage	max. 250 V AC/DC
Switching current per output	max. 6 A
Min. load current	10 mA (12 V DC)
Power rating (voltage dependent)	max. 1500 VA/120 W
Switching frequency	max. 10 Hz
Contact material	Ag Sn O2
Energize/release/contact bounce time	10/15/1.5 ms

Utilization category

AC-12	6 A (24/110/230 V AC)
AC-15	3 A (24/110/230 V AC)
DC-13	1 A (24 V DC); 0.2 A (110 V DC); 0.1 A (230 V DC)

General data

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 10/20

Murrelektronik Ltd. | 5 Albion Street, Pendlebury Industrial Estate, Swinton | Manchester M27 4FG | Fon +44 161 728 3133 | Fax +44 161 728 3130 | shop@murrelektronik.co.uk | shop.murrelektronik.co.uk

Mech./ elect. life	20 000 000 switching cycles/load dependent
--------------------	--

Test isolation voltage	4 kV; safe separation (EN 60947-1)
------------------------	------------------------------------

Mounting method	DIN-rail mountable (EN 60715)
-----------------	-------------------------------

Temperature range	-20...+55 °C
-------------------	--------------

Dimensions H×W×D	91×6.2×70 mm
------------------	--------------

Commercial data

country of origin	CZ
-------------------	----

customs tariff number	85364900
-----------------------	----------

EAN	4048879027175
-----	---------------

eClass	27371001
--------	----------

Packaging unit	1
----------------	---