

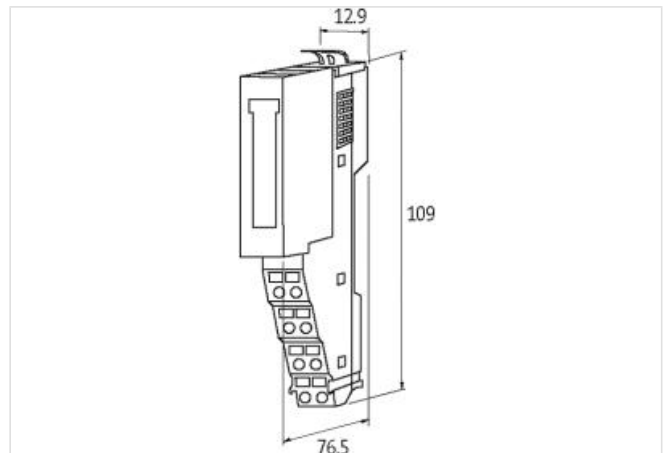
CUBE20S ANALOG INPUT MODULE AI2

2X16Bit (I 0(4)...20mA)

Expansion module
AI2 - (E) U
Current

[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	0...+60 °C (storage temperature -25...+70 °C)
Protection	IP20
Connection	Spring clamp plug-in terminals: max. 1.5 mm ² (AWG 16)
Dimensions H×W×D	109×12.9×76.5 mm

Input

Connection	Differential current input
Accuracy	max. 0.3%
Conversion time (analog)	240 μs (all channels)
Resolution (analog)	15 Bit + sign

Internal communication

Current consumption	max. 60 mA from system, max. 15 mA externally (UI)
Module supply	via system connection

Diagnostic

Communication status	via LED
Diagnostic via LED	per module and channel
Diagnostic via BUS	per module
Monitoring - under voltage	yes
Monitoring - no voltage	no
Wire break upper/lower limit overload	per module via LED and BUS
Short-circuit and overload	yes

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-08-12

Murrelektronik Ltd. | 5 Albion Street, Pendlebury Industrial Estate, Swinton | Manchester M27 4FG | Fon +44 161 728 3133 | Fax +44 161 728 3130 | shop@murrelektronik.co.uk | shop.murrelektronik.co.uk

