



MKS - D 20/1300-1 M DIODE MODULES

Mounting rail / screw-type terminal

20 diodes
Common potential anode

[Link to Product](#)

Illustration

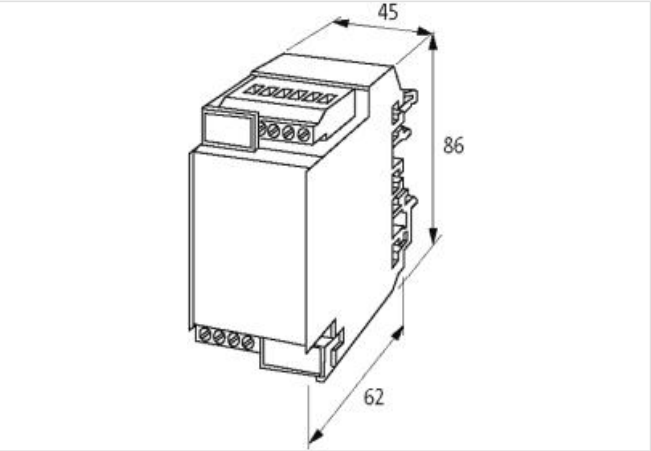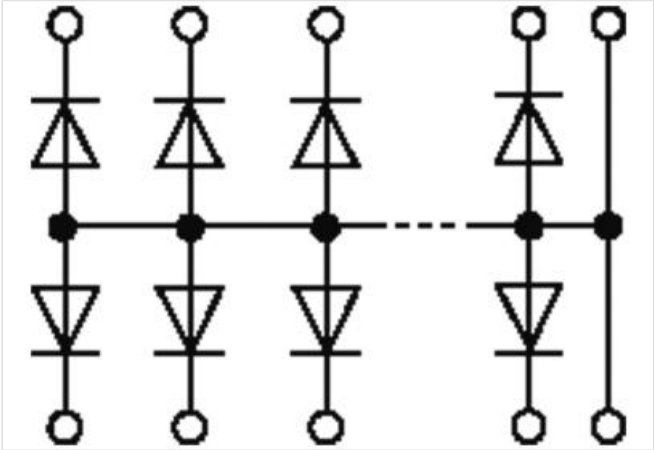

Product may differ from Image



| Commercial data | |
|-----------------|----------|
| ECLASS-6.0 | 27371010 |
| ECLASS-6.1 | 27371010 |
| ECLASS-7.0 | 27371010 |
| ECLASS-8.0 | 27371010 |
| ECLASS-9.0 | 27371010 |
| ECLASS-10.1 | 27371010 |
| ECLASS-11.1 | 27371010 |
| ECLASS-12.0 | 27371010 |

| | |
|---|-------------------------------------|
| ETIM-5.0 | EC002780 |
| customs tariff number | 85411000 |
| GTIN | 4048879041928 |
| Packaging unit | 1 |
| Electrical data Supply | |
| Operating voltage AC max. | 48 V |
| Operating voltage DC max. | 48 V |
| Installation | |
| Connection cross section max. | 4 mm ² |
| Installation Connection | |
| Connection | Screw terminals SK |
| Mechanical data Mounting data | |
| Mounting method | geschnappt |
| Suitable for mounting type | Mounting rail TH35, G32, (EN 60715) |
| Height | 86 mm |
| Width | 45 mm |
| Depth | 62 mm |
| Environmental characteristics Climatic | |
| Operating temperature min. | -20 °C |
| Operating temperature max. | 60 °C |
| Connection type 1 | |
| Connection | Screw terminals SK |
| Family construction form | terminal |
| Gender | female |
| No. of poles | 22 |