



ASSEMBLY MODULE MKS - M 4

Mounting rail / screw-type terminal

4 pairs of solder pins
screw terminals connected to solder pin pairs

Link to Product

Illustration

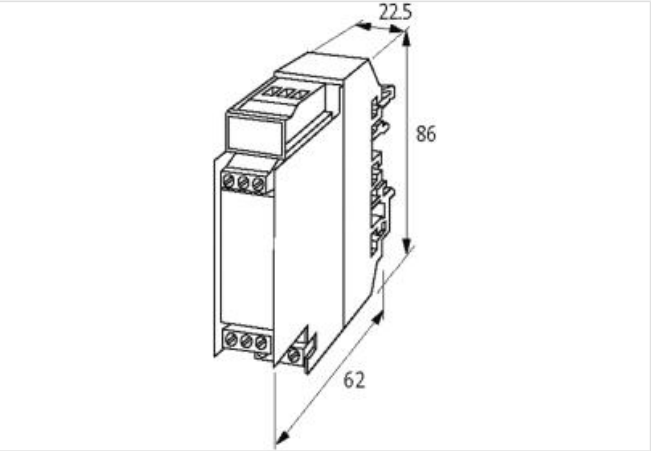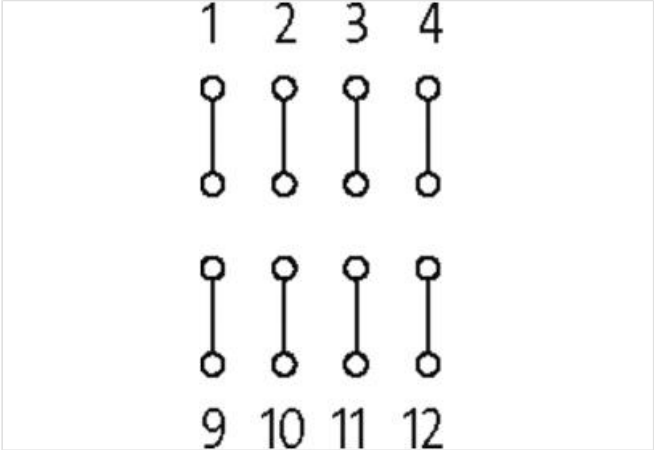

Product may differ from Image



| Commercial data | |
|-----------------|----------|
| ECLASS-6.0 | 27379201 |
| ECLASS-6.1 | 27141149 |
| ECLASS-7.0 | 27141149 |
| ECLASS-8.0 | 27141149 |
| ECLASS-9.0 | 27141149 |
| ECLASS-10.1 | 27141149 |
| ECLASS-11.1 | 27141149 |
| ECLASS-12.0 | 27141149 |

| | |
|---|-------------------------------------|
| ETIM-5.0 | EC002780 |
| customs tariff number | 85369010 |
| GTIN | 4048879041812 |
| Packaging unit | 1 |
| Electrical data Supply | |
| Operating voltage AC max. | 250 V |
| Operating voltage DC max. | 250 V |
| Operating current max. | 2,5 A |
| Device protection Media | |
| Flame resistance | flame retardant |
| Mechanical data Material data | |
| Housing properties | removable cover |
| Material housing | Plastic |
| Mechanical data Mounting data | |
| Distance of solder pins | 30 mm |
| Mounting method | geschnappt |
| Suitable for mounting type | Mounting rail TH35, G32, (EN 60715) |
| Height | 68 mm |
| Width | 22,5 mm |
| Depth | 65 mm |
| Environmental characteristics Climatic | |
| Operating temperature min. | -20 °C |
| Operating temperature max. | 60 °C |
| Connection type 1 | |
| Connection | Screw terminals SK |
| Family construction form | terminal |
| Gender | female |
| No. of poles | 8 |