




Emergency stop with 2 positive opening

contacts in a 42mm enclosure

E-Stop 42 2NC M12(5)  
with M12 connection  
5-pole  
Emergency-Stop button  
2 NC (positively-opening)  
mounting with clip on the back side

Link to Product

Illustration

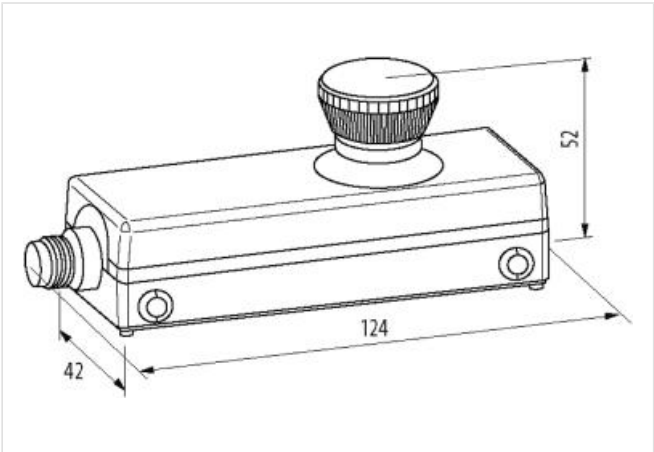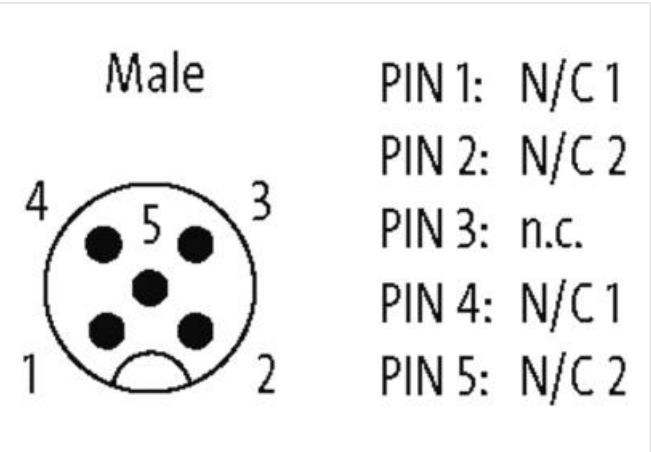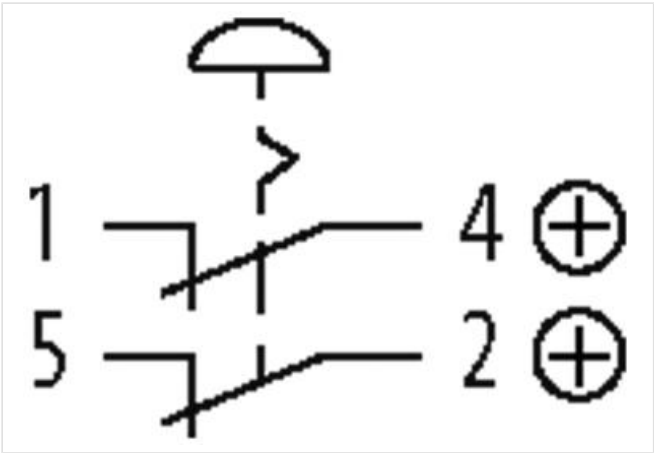

Product may differ from Image



Commercial data	
ECLASS-6.0	27371244
ECLASS-6.1	27371244
ECLASS-7.0	27371244
ECLASS-8.0	27371244

ECLASS-9.0	27371244
ECLASS-10.1	27371244
ECLASS-11.1	27371244
ECLASS-12.0	27371244
ETIM-5.0	EC002034
customs tariff number	85365080
GTIN	4048879594202
Packaging unit	1

**Electrical data | Supply**

Operating voltage AC	24 V
Operating voltage DC	24 V
Operating current	2 A

**Device protection**

Condition lifetime	load-dependent, temperature dependent
--------------------	---------------------------------------

**Device protection | Electrical**

Degree of protection (EN IEC 60529)	IP65
Electrical lifetime	50000 Cycles

**Device protection | Mechanical**

Mechanical endurance	50000 Cycles
Operating life B10d	250000 Cycles

**Mechanical data**

Bounce time max.	10 ms
------------------	-------

**Mechanical data | Material data**

Material contact	AgNi
------------------	------

**Mechanical data | Mounting data**

Height	52 mm
Width	124 mm
Depth	42 mm

**Environmental characteristics | Climatic**

Operating temperature min.	-25 °C
Operating temperature max.	70 °C
Storage temperature min.	-25 °C
Storage temperature max.	85 °C

**Technical Data | Reliability**

Lambda normally closed contact	20 %
--------------------------------	------

**Connection type 1**

Family construction form	M12
Gender	male
Color contact carrier	black
Coding	A
No. of poles	5
PIN 1	NC 2
PIN 2	NC 1 +
PIN 4	NC 2 +
PIN 5	NC 2