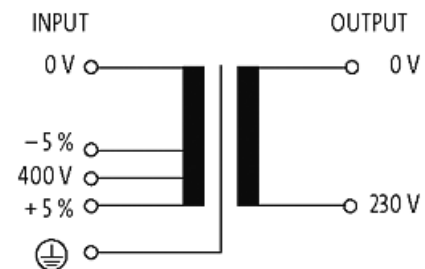
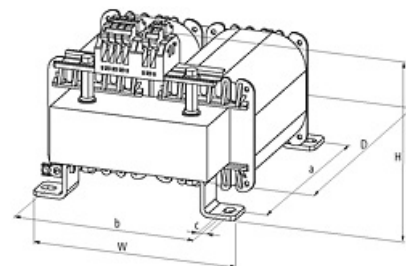


**MET 1-PHASE CONTROL AND ISOLATION TRANSFORMER**

P: 2000VA IN: 400VAC+/- 5% OUT: 230VAC

Single-phase - Control and Isolation Transformers  
2000 VA  
Isolation class T 40/B

[Link to Product](#)**Illustration**

Product may differ from Image

**Approvals****General data**

|                        |   |
|------------------------|---|
| Standards              | EN 61558-1, EN 61558-2-4, EN 62041 category 0 |
| Test isolation voltage | 4 kV (prim./sec.)                             |

The information in this brochure has been compiled with the utmost care.  
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 08/21

|                        |   |
|------------------------|---|
| Dimensions H×W×D       | 170×195×250 mm                                  |
| Fixing centers a×b×c   | 200×174×9 mm                                    |
| Drill hole Ø           | 9×14 mm   |
| Mounting method        | Long-hole mounting                              |
| Temperature range      | -20...+40 °C (storage temperature -40...+80 °C) |
| <b>Output</b>          |   |
| Output voltage         | 230 V AC  |
| Output rating          | 2000 VA   |
| <b>Input</b>           |   |
| Input voltage          | 400 V AC ±5%                                    |
| Frequency              | 50...60 Hz                                      |
| Short-circuit current  | 182 A (400 V AC)                                |
| Input current          | 5.1 A (400 V AC)                                |
| Inrush current         | 76 A (400 V AC)                                 |
| <b>Commercial data</b> |   |
| country of origin      | CZ  |
| customs tariff number  | 85043200  |
| EAN                    | 4048879078825                                   |
| eClass                 | 27031302  |
| Packaging unit         | 1   |