

SUPPRESSOR FOR MOTORS

VDR, star, 3x400 VAC, 10 kW


3× 400 V AC

VDR

Suppressors for other voltages, frequencies, and motor ratings available on request. Do not use RC motor suppressors with frequency inverters.

[Link to Product](#)

Illustration

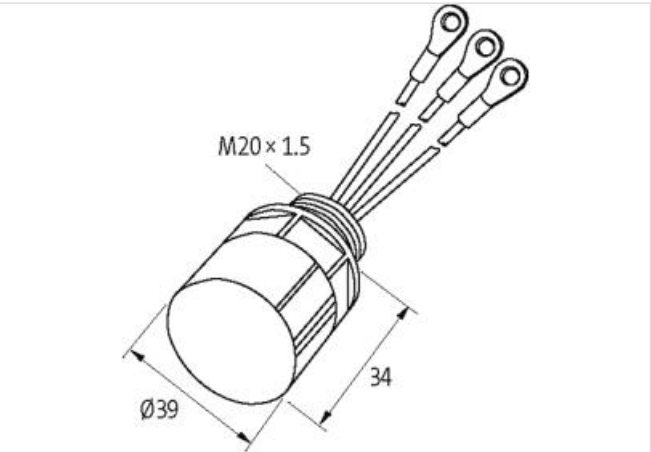

Product may differ from Image



Commercial data	
ECLASS-6.0	27371013
ECLASS-6.1	27371013
ECLASS-7.0	27371013
ECLASS-8.0	27371013
ECLASS-9.0	27371013
ECLASS-10.1	27371013

ECLASS-11.1	27371013
ECLASS-12.0	27371013
ETIM-5.0	EC000197
customs tariff number	85363010
GTIN	4048879019132
Packaging unit	1
<b>Electrical data   Input</b>	
Input voltage AC	400 V
<b>Installation</b>	
Connection cross section max.	1 mm <sup>2</sup>
<b>Installation   Connection</b>	
Connection information	Single strands
Length single strands	150 mm
Ring terminals	M6isolated
<b>Device protection   Media</b>	
Flame resistance	flame retardant
<b>Mechanical data   Material data</b>	
Combustibility class housing (UL94)	V-0
Material housing	Plastic
Material potting compound	2-component epoxy
<b>Mechanical data   Mounting data</b>	
Mounting method	inserted
Suitable for mounting type	Motorklemmkasten
Height	39 mm
Width	39 mm
Depth	44 mm
<b>Environmental characteristics   Climatic</b>	
Operating temperature min.	-20 °C
Operating temperature max.	60 °C