

SUPPRESSOR FOR CONTACTORS

Diode, 24....240 VDC, 50 W



24...240 V DC

Diode

For other configurations and voltages, please inquire.

Link to Product

Illustration

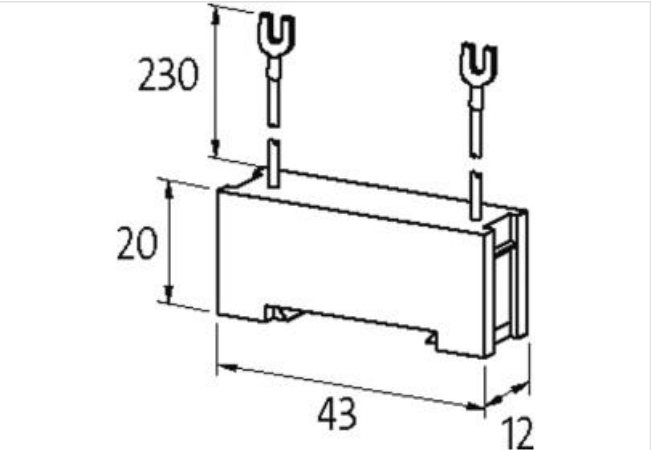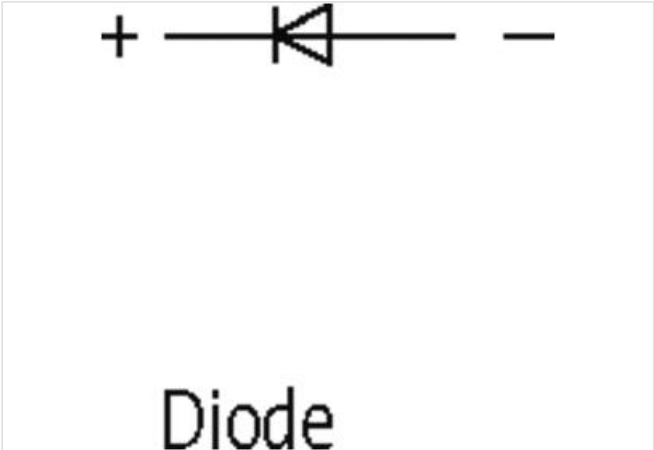

Product may differ from Image



| Commercial data |          |
|-----------------|----------|
| ECLASS-6.0      | 27371013 |
| ECLASS-6.1      | 27371013 |
| ECLASS-7.0      | 27371013 |
| ECLASS-8.0      | 27371013 |
| ECLASS-9.0      | 27371013 |
| ECLASS-10.1     | 27371013 |

|                       |               |
|-----------------------|---------------|
| ECLASS-11.1           | 27371013      |
| ECLASS-12.0           | 27371013      |
| ETIM-5.0              | EC002498      |
| customs tariff number | 85363010      |
| GTIN                  | 4048879018647 |
| Packaging unit        | 1             |

**Compatibility | Compatible with**

|                        |           |
|------------------------|-----------|
| Appropriate contactors | universal |
|------------------------|-----------|

**Electrical data**

|                    |      |
|--------------------|------|
| Holding power max. | 50 W |
|--------------------|------|

**Electrical data | Input**

|                       |       |
|-----------------------|-------|
| Input voltage DC min. | 24 V  |
| Input voltage DC max. | 240 V |

**Mechanical data | Mounting data**

|        |       |
|--------|-------|
| Height | 20 mm |
| Width  | 43 mm |
| Depth  | 12 mm |

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -20 °C |
| Operating temperature max. | 70 °C  |