

## MPUJW ANALOG COUPLER COMPONENT

IN: 0..10 V - OUT: 0..10 V / 300 mA

INPUT: 0...10 V DC

OUTPUT: 0...10 V DC, 300 mA



Screw terminals

This product is a processing component and must only be used by authorized manufacturers or people.

Input and output galvanically separated

### [Link to Product](#)

#### Illustration

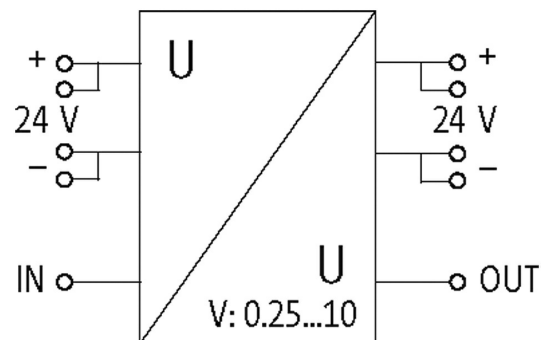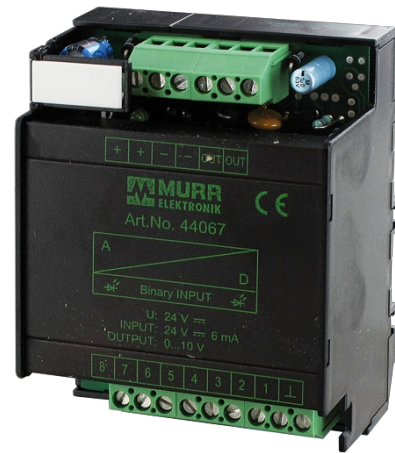

Regular voltage amplification

Product may differ from Image

#### General data

Mounting method	DIN-rail mountable (EN 60715)
Temperature range	0...+50 °C
Dimensions H×W×D	62×86×67.5 mm

#### Technical Data

Operating voltage	24 V DC ±20%, smoothed
Operating current	max. 300 mA
Tolerance	max. 0.5%
Frequency	max. 1 kHz

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 01/21

Murrelektronik Ltd. | 5 Albion Street, Pendlebury Industrial Estate, Swinton | Manchester M27 4FG | Fon +44 161 728 3133 | Fax +44 161 728 3130 | shop@murrelektronik.co.uk | shop.murrelektronik.co.uk

**Voltage inputs**

Input resistor	approx. 10 k $\Omega$
----------------	-----------------------

**Voltage output signals**

Load	max. 300 mA
------	-------------

**Commercial data**

country of origin	CZ
customs tariff number	85437090
EAN	4048879028516
eClass	27210990
Packaging unit	1