



MA SI67 INSTALLATION TECHNOLOGY

Converter 2x profile cable to 7/8" male

MA SI67 converter  
2x profile cable to 7/8" (male)  
Connection cables are in the online shop under "Connection Technology".

Link to Product

Illustration

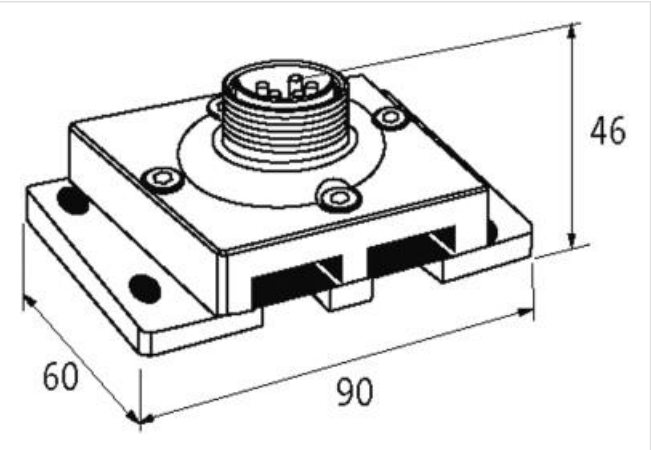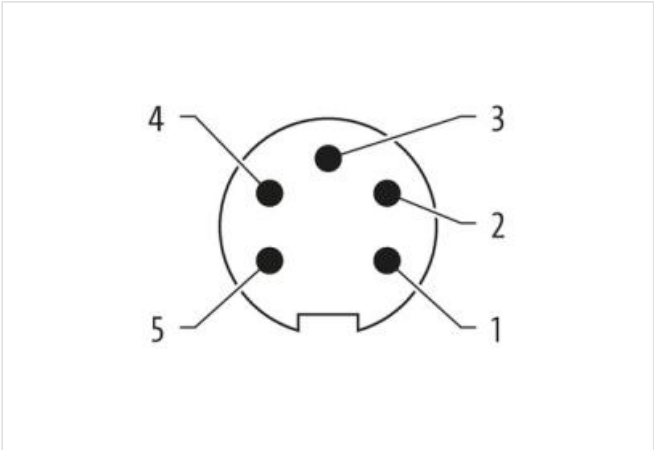

Product may differ from Image



| Commercial data |          |
|-----------------|----------|
| ECLASS-6.0      | 27400209 |
| ECLASS-6.1      | 27279219 |
| ECLASS-7.0      | 27279219 |
| ECLASS-8.0      | 27279219 |
| ECLASS-9.0      | 27440108 |
| ECLASS-10.1     | 27440111 |

|                                                 |                           |
|-------------------------------------------------|---------------------------|
| ECLASS-11.1                                     | 27440111                  |
| ECLASS-12.0                                     | 27440111                  |
| ETIM-5.0                                        | EC001583                  |
| customs tariff number                           | 85369010                  |
| GTIN                                            | 4048879052153             |
| Packaging unit                                  | 1                         |
| <b>Electrical data   Supply</b>                 |                           |
| Operating voltage DC max.                       | 36 V                      |
| Total current max.                              | 8 A                       |
| <b>Device protection   Electrical</b>           |                           |
| Degree of protection (EN IEC 60529)             | IP67                      |
| Insulation strength ASI/Power                   | 200 V                     |
| <b>Mechanical data   Mounting data</b>          |                           |
| Mounting method                                 | screwed, geschnappt       |
| Suitable for mounting type                      | mounting rail, (EN 60715) |
| Height                                          | 90 mm                     |
| Width                                           | 74 mm                     |
| Depth                                           | 46 mm                     |
| <b>Environmental characteristics   Climatic</b> |                           |
| Operating temperature min.                      | -20 °C                    |
| Operating temperature max.                      | 60 °C                     |
| Storage temperature min.                        | -40 °C                    |
| Storage temperature max.                        | 80 °C                     |
| <b>Conformity</b>                               |                           |
| Product standard                                | EN 60664-1                |
| <b>Connection type 1</b>                        |                           |
| Family construction form                        | 7/8"                      |
| Gender                                          | male                      |
| Color contact carrier                           | black                     |
| No. of poles                                    | 5                         |
| PIN 1                                           | AS-i +                    |
| PIN 2                                           | AS-i -                    |
| PIN 3                                           | n.c.                      |
| PIN 4                                           | 24 V DC                   |
| PIN 5                                           | 0 V                       |