



EUROCARD HOLDER

SKP 31/II

Screw terminals
31-pole (DIN 41617)
Connection via double row terminals on one side
With the vertical snap adapter SASA 135 Art.-No. 63900 the holder can be mounted at right-angles on the rail.
The D2 size is for a card without a front plate.
To insert the card first press down the 2 yellow buttons. Then slide the Eurocard into the guide slots pushing until fully engaged. The card is now locked into position. It can be removed by pressing down on the 2 yellow buttons.

[Link to Product](#)

Illustration

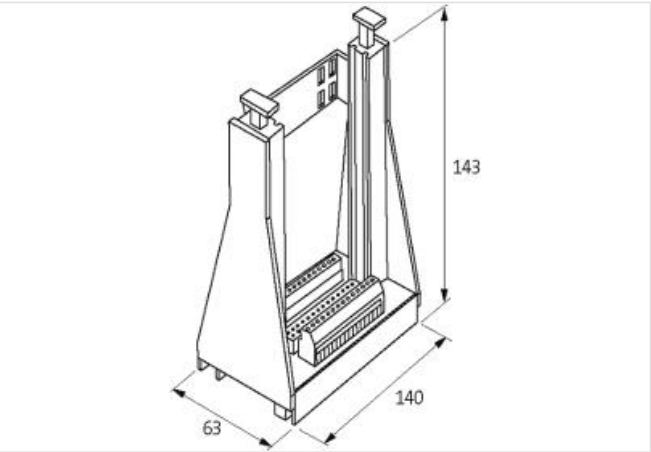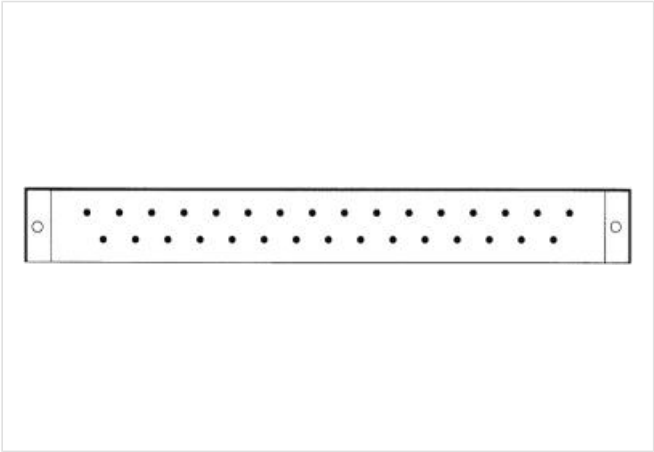

Product may differ from Image



| Commercial data | |
|-----------------|----------|
| ECLASS-6.0 | 27260710 |
| ECLASS-6.1 | 27260704 |
| ECLASS-7.0 | 27440402 |

| | |
|--|---------------------------|
| ECLASS-8.0 | 27440402 |
| ECLASS-9.0 | 27460201 |
| ECLASS-10.1 | 27440402 |
| ECLASS-11.1 | 27460201 |
| ECLASS-12.0 | 27460201 |
| ETIM-5.0 | EC002780 |
| customs tariff number | 85366990 |
| GTIN | 4048879042208 |
| Packaging unit | 1 |
| Electrical data Supply | |
| Operating voltage AC | 250 V |
| Operating current max. | 5 A |
| Installation | |
| Connection cross-section solid max. | 4 mm ² |
| Installation Pin assignment | |
| No. of poles | 31 |
| Device protection Electrical | |
| Overvoltage category (EN 60664-1) | I |
| Device protection Media | |
| Flame resistance | flame retardant |
| Mechanical data | |
| Type of socket connector | DIN 41617 |
| Mechanical data Material data | |
| Material housing | Plastic |
| Mechanical data Mounting data | |
| Mounting method | screwed, geschnappt |
| Suitable for mounting type | mounting rail, (EN 60715) |
| Height | 137 mm |
| Width | 63 mm |
| Depth | 170 mm |