

MKS-LDP 5/1300 - 1 M DIODE MODULES


Mounting rail / screw-type terminal


Universal diode 1 300 V, 1 A 5 pair of diodes Common potential anode Pairs of joined diodes with common control for lamp test

Link to Product

Illustration



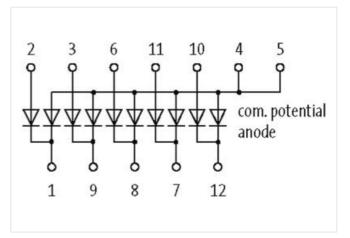



Product may differ from Image





Commercial data		
ECLASS-6.0	27371010	
ECLASS-6.1	27371010	
ECLASS-7.0	27371010	
ECLASS-8.0	27371010	
ECLASS-9.0	27371010	
ECLASS-10.1	27371010	

The information in this Product-PDF has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2024-05-05



ECLASS-11.1	27371010	
ECLASS-12.0	27371010	
ETIM-5.0	EC002780	
customs tariff number	85411000	
GTIN	4048879041843	
Packaging unit	1	
Mechanical data Mounting data		
Mounting method	geschnappt	
Suitable for mounting type	Mounting rail TH35, G32, (EN 60715)	
Height	86 mm	
Width	22,5 mm	
Depth	62 mm	
Environmental characteristics Climati	С	
Operating temperature min.	-20 °C	
Operating temperature max.	60 °C	
Connection type 1		
Connection	Screw terminals SK	
Family construction form	terminal	
Gender	female	
No. of poles	12	