
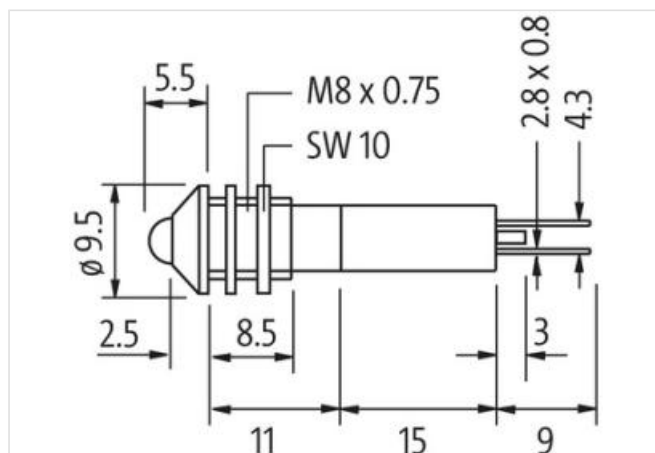


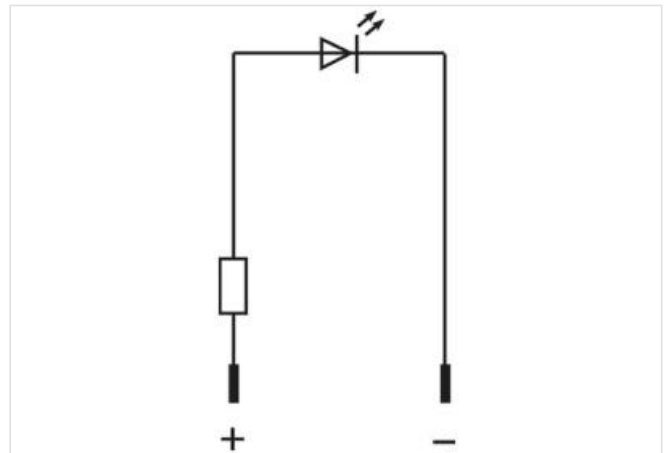

**Electrical data | Supply**

|                           |        |
|---------------------------|--------|
| Operating voltage DC      | 24 V   |
| Operating voltage DC min. | 20,4 V |
| Operating voltage DC max. | 26,4 V |
| Current consumption max.  | 18 mA  |

**Installation | Connection**

|                        |                   |
|------------------------|-------------------|
| Connection information | Faston 2.8×0.8 mm |
|------------------------|-------------------|

**Mechanical data | Material data**

|                  |               |
|------------------|---------------|
| Coating housing  | chrome-plated |
| Material housing | Brass         |

**Mechanical data | Mounting data**

|        |         |
|--------|---------|
| Height | 9,5 mm  |
| Width  | 9,5 mm  |
| Depth  | 77,5 mm |

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -40 °C |
| Operating temperature max. | 70 °C  |