

MEN POWER SUPPLY 1/2-PHASE, SMOOTHED

IN: 230/400+/-15VAC OUT: :24V/10ADC

Current: 10 A



Output rating: 240 W

This power supply units meet the (EN 61000-3-2) standard for harmonic current.


Condensation not permitted

Link to Product

Illustration

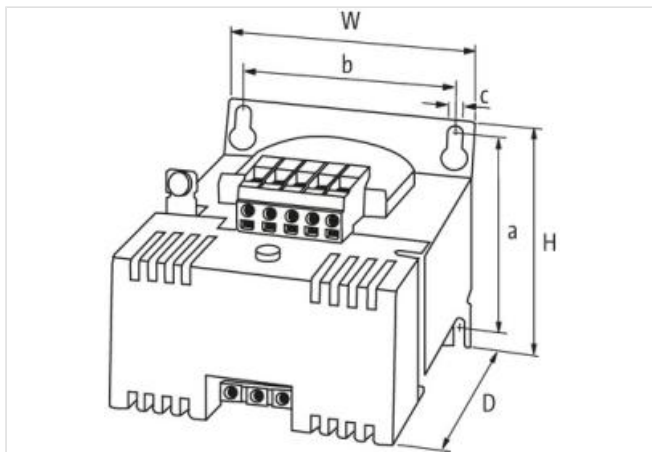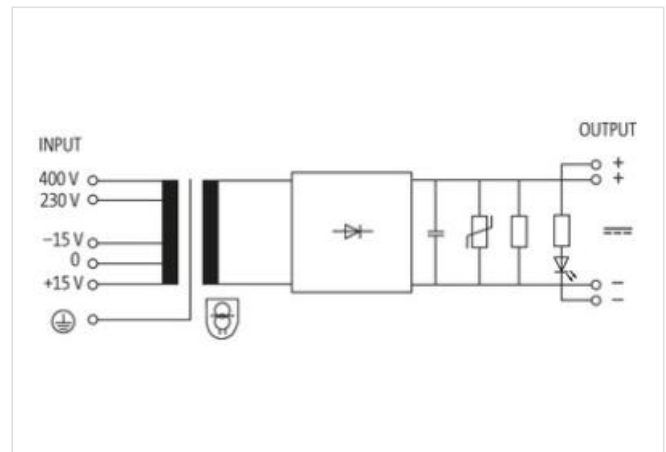

Product may differ from Image

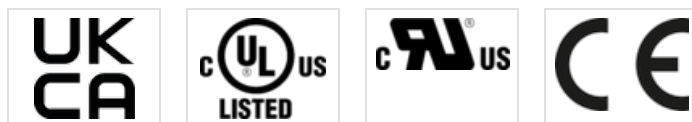

Commercial data

ECLASS-6.0	27049002
ECLASS-6.1	27049002
ECLASS-7.0	27049002
ECLASS-8.0	27049002
ECLASS-9.0	27040701
ECLASS-10.1	27040701

The information in this Product-PDF has been compiled with the utmost care.

The information in this Product PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2024-05-01

ECLASS-11.1	27040701
ECLASS-12.0	27040701
ETIM-5.0	EC002540
customs tariff number	85044095
GTIN	4048879080057
Packaging unit	1

Electrical data

Security level	SELV
----------------	------

Electrical data | Supply

Power frequency	50 ... 60 Hz
-----------------	--------------

Electrical data | Input

Fuse protection 1 primary side external	3,15 A @230 V AC
Fuse protection 2 primary side external	1,6 A @400 V AC
Characteristic back-up fuse	Inertia
Input voltage 1 AC	230 V
Input voltage 1 AC min.	195,5 V
Input voltage 1 AC max.	264,5 V
Input voltage 2 AC	400 V
Input voltage 2 AC min.	340 V
Input voltage 2 AC max.	460 V
Input current at input voltage 1 AC	1,7 A
Input current at input voltage 2 AC	0,97 A

Electrical data | Output

Fuse protection secondary side external	20 A
Output suppression	LED, Screening capacitor, VDR
Output voltage DC	24 V
Output voltage adjustable	no
Output current max.	12 A
Type of secondary fuse	Flat fuse FKS
Ripple max.	5 %

Mechanical data | Mounting data

Suitable for mounting type	Schlüssellochabhängung
Mounting dimension a	94,5 mm
Mounting dimension b	90 mm
Mounting dimension c	5,8 mm
Height	112,5 mm
Width	120 mm
Depth	160 mm

Environmental characteristics | Climatic

Operating temperature min.	-20 °C
Operating temperature max.	60 °C
Derating from	40 °C

Conformity

Product standard	EN 61558-2-6, EN 62041 category I
EMC	EN 55011 B, EN 61000-3-2

Connection type 3

Connection	Screw terminals SK
Family construction form	terminal
Gender	female
Color contact carrier	metallic
No. of poles	1

PIN 1	PE
Connection	Screw terminals SK
Family construction form	terminal
Gender	female
Color contact carrier	green
No. of poles	3
PIN 1	+
PIN 2	-
PIN 3	-
Connection	Screw terminals SK
Family construction form	terminal
Gender	female
Color contact carrier	green
No. of poles	5
PIN 1	+ 15 V
PIN 3	- 15 V
PIN 4	230 V
PIN 5	400 V