
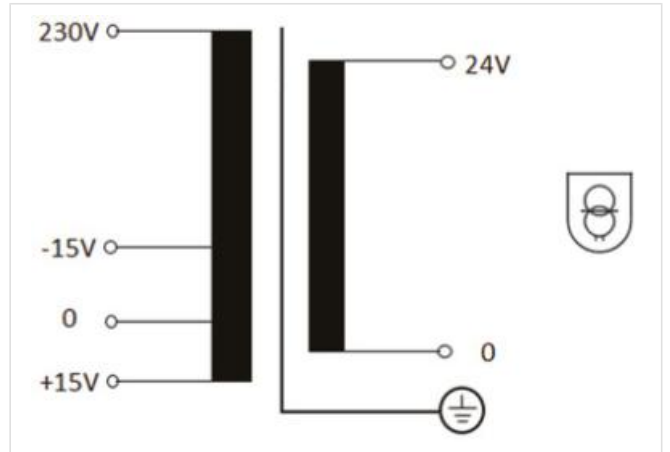
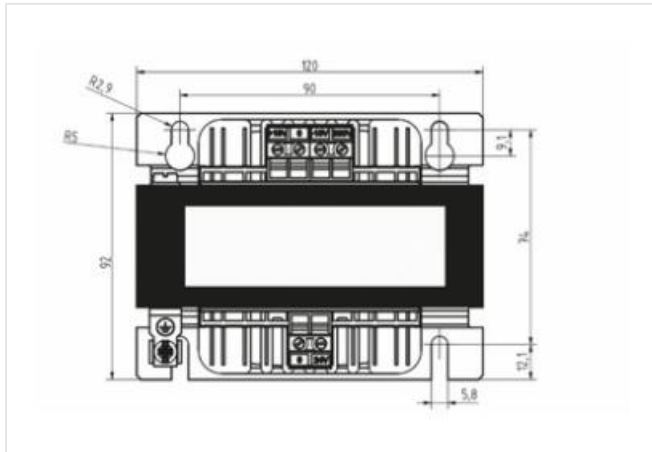


P: 320VA IN: 230VAC +/- 15VAC OUT: 24VAC

[Link to Product](#)

## A 3D perspective rendering of a black industrial terminal block. The block has a rectangular body with a mounting flange on top featuring two circular holes. A green 5-pin terminal block is mounted on the top surface. On the front face, there is an orange 2-pin terminal block and another green 5-pin terminal block. The device is shown against a plain white background.

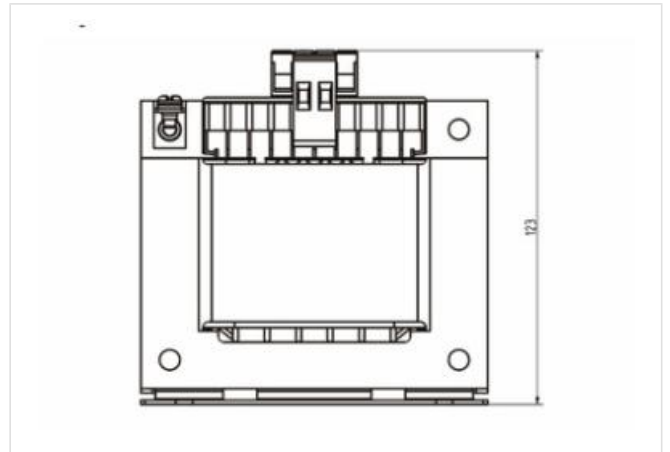

Power frequency	50/60 Hz
-----------------	----------

Input voltage AC	230 V
Current input AC	1,6 A
Max. inrush current	26 A
Short-circuit current	28 A

Murrelektronik Ltd. | 5 Albion Street, Pendlebury Industrial Estate, Swinton | Manchester M27 4FG | Fon +44 161 728 3133 | Fax +44 161 728 3130 | [shop@murrelektronik.co.uk](mailto:shop@murrelektronik.co.uk) | [shop.murrelektronik.co.uk](http://shop.murrelektronik.co.uk)

Electrical data   Output	
Output voltage AC	24 V
Mechanical data   Mounting data	
Mounting method	screwed
Suitable for mounting type	Schlüssellochabhängung
Mounting dimension a	74 mm
Mounting dimension b	90 mm
Mounting dimension c	2,9 mm
Height	92 mm
Width	120 mm
Depth	123 mm
Diameter bore	2,9 mm
Length bore	9,1 mm
Environmental characteristics   Climatic	
Ambient temperature min.	-20 °C
Ambient temperature max.	40 °C
Storage temperature min.	-30 °C
Storage temperature max.	80 °C
Conformity	
Product standard	EN 61558-1, EN 61558-2-6, EN 62041
EMC	2014/30/EU
Commercial data	
customs tariff number	85043180
GTIN	4065909078754
Packaging unit	1