

M12-DISTRIBUTOR BOX 4-WAY, 5-POLE WITHOUT LED

MVC4-UQQ5.0-XA 5m PUR-CNOMO-cable 8x0,34/3x1


4-way, 5-pole
PUR/PVC (CNOMO)
5.0 m
without LED

Link to Product

Illustration



Product may differ from Image

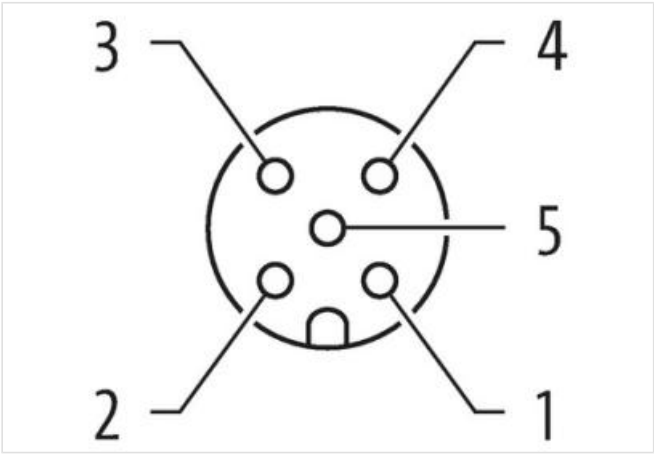

Commercial data

| | |
|-----------------------|---------------|
| ECLASS-6.0 | 27279219 |
| ECLASS-7.0 | 27279219 |
| ECLASS-8.0 | 27279219 |
| ECLASS-9.0 | 27440108 |
| ETIM-5.0 | EC002585 |
| customs tariff number | 85444290 |
| GTIN | 4048879000178 |
| Packaging unit | 1 |

Electrical data | Supply

| | |
|------------------------------------|------|
| Operating voltage DC | 24 V |
| Current operating per contact max. | 4 A |
| Total current max. | 10 A |

Industrial communication

| | |
|----------------------------|---|
| Number of signals per port | 2 |
|----------------------------|---|

Installation | Connection

| | |
|--------------|---------|
| Mounting set | M12 x 1 |
|--------------|---------|

Device protection | Electrical

| | |
|--|-------------------|
| Degree of protection (EN IEC 60529) | IP67 |
| Additional condition protection degree | inserted, screwed |

Mechanical data | Mounting data

| | |
|-----------------|----------------|
| Mounting method | Schraubgewinde |
| Height | 117 mm |
| Width | 54 mm |

Depth 33 mm

Environmental characteristics | Climatic

| | |
|----------------------------|--------|
| Operating temperature min. | -20 °C |
| Operating temperature max. | 80 °C |

Connection type 2

| | |
|--------------------------|----------------|
| Family construction form | free cable end |
| No. of poles | 11 |
| Family construction form | M12 |
| Gender | female |
| Color contact carrier | black |
| Coding | A |
| No. of poles | 5 |
| PIN 1 | + |
| PIN 3 | - |
| PIN 5 | PE |