

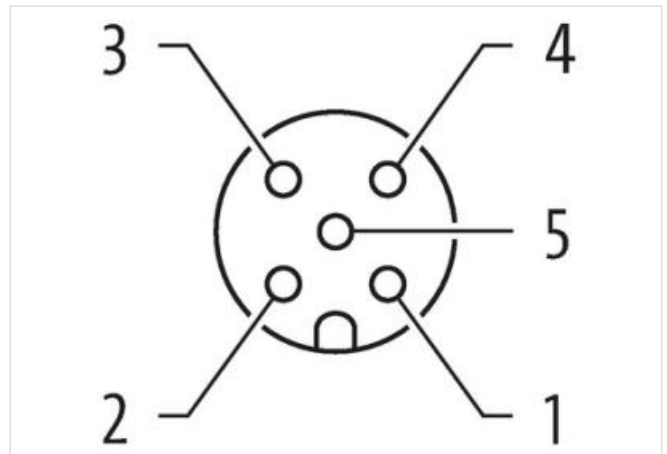
**M12-DISTRIBUTOR BOX 8-WAY, 5-POLE WITHOUT LED**

MVC8-UQQ10.0-XA 10m PUR-CNOMO-cable 16x0,34/3x1

8-way, 5-pole  
 PUR/PVC (CNOMO)  
 10.0 m  
 without LED  
 Further cable lengths on request.

[Link to Product](#)**Illustration**

Product may differ from Image

**Commercial data**

ECLASS-6.0	27279219
ECLASS-6.1	27279219
ECLASS-7.0	27279219
ECLASS-8.0	27279219
ECLASS-9.0	27440108
ECLASS-10.1	27440108
ECLASS-11.1	27440108
ECLASS-12.0	27440108
ETIM-5.0	EC002585
customs tariff number	85444290
GTIN	4048879000215
Packaging unit	1

**Electrical data | Supply**

Operating voltage DC	24 V
Current operating per contact max.	4 A
Total current max.	10 A

**Industrial communication**

Number of signals per port	2
----------------------------	---

**Installation | Connection**

Mounting set	M12 x 1
--------------	---------

**Device protection | Electrical**

Degree of protection (EN IEC 60529)	IP67
-------------------------------------	------

Additional condition protection degree      inserted, screwed

**Mechanical data | Mounting data**

Mounting method	Schraubgewinde
Height	127 mm
Width	54 mm
Depth	29 mm

**Environmental characteristics | Climatic**

Operating temperature min.	-20 °C
Operating temperature max.	80 °C

**Connection type 2**

Family construction form	free cable end
No. of poles	19
Family construction form	M12
Gender	female
Color contact carrier	black
Coding	A
No. of poles	5
PIN 1	+
PIN 3	-
PIN 5	PE