

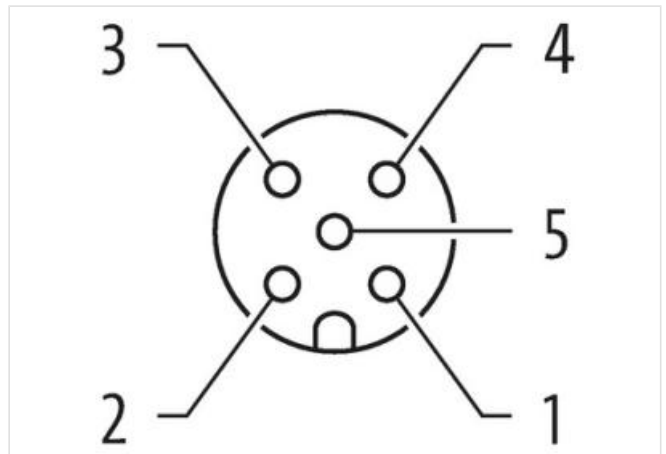
**M12-DISTRIBUTOR BOX 8-WAY, 5-POLE WITHOUT LED**

MVC8-UQQ15.0-XA 15m PUR-CNOMO-cable 16x0,34/3x1

8-way, 5-pole  
 PUR/PVC (CNOMO)  
 15.0 m  
 without LED  
 Further cable lengths on request.

[Link to Product](#)**Illustration**

Product may differ from Image

**Commercial data**

ECLASS-6.0	27279219
ECLASS-7.0	27279219
ECLASS-8.0	27279219
ECLASS-9.0	27440108
ETIM-5.0	EC002585
customs tariff number	85444290
GTIN	4048879000222
Packaging unit	1

**Electrical data | Supply**

Operating voltage DC	24 V
Current operating per contact max.	4 A
Total current max.	10 A

**Industrial communication**

Number of signals per port	2
----------------------------	---

**Installation | Connection**

Mounting set	M12 x 1
--------------	---------

**Device protection | Electrical**

Degree of protection (EN IEC 60529)	IP67
Additional condition protection degree	inserted, screwed

**Mechanical data | Mounting data**

Mounting method	Schraubgewinde
Height	127 mm

Width	54 mm
Depth	29 mm

**Environmental characteristics | Climatic**

Operating temperature min.	-20 °C
Operating temperature max.	80 °C

**Connection type 3**

Family construction form	free cable end
Color contact carrier	gray
No. of poles	13
Family construction form	free cable end
No. of poles	19
Family construction form	M12
Gender	female
Color contact carrier	black
Coding	A
No. of poles	5
PIN 1	+
PIN 3	-
PIN 5	PE