
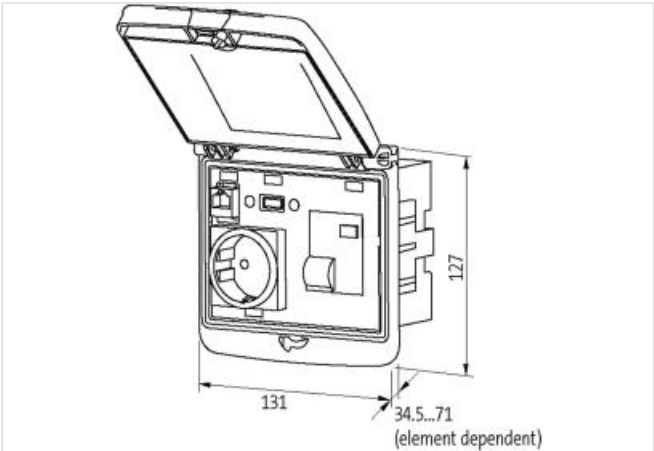


Modlink MSDD-set: Frame 4000-68522-0000001,  
insert 4000-68000-4390000

Link to Product

Illustration

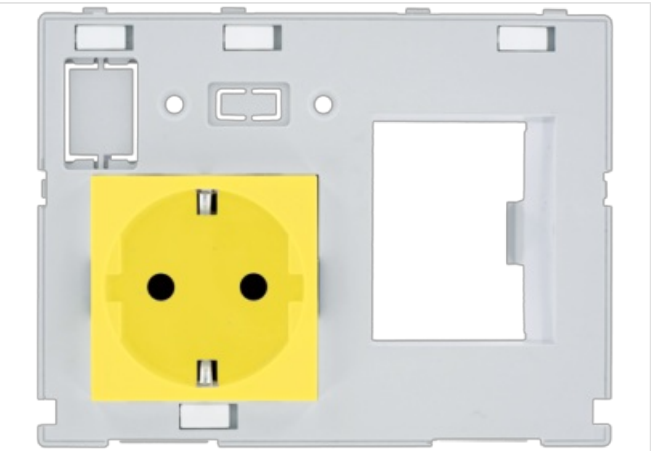

Product may differ from Image



| Commercial data       |               |
|-----------------------|---------------|
| ECLASS-6.0            | 27189217      |
| ECLASS-7.0            | 27189217      |
| ECLASS-8.0            | 27189217      |
| ECLASS-9.0            | 27189217      |
| ETIM-5.0              | EC002625      |
| customs tariff number | 85366990      |
| GTIN                  | 4048879421898 |
| Packaging unit        | 1             |
| Frame                 |               |

|                                               |             |
|-----------------------------------------------|-------------|
| Degree of protection (EN IEC 60529)           | IP65        |
| Operating temperature min.                    | -30 °C      |
| Operating temperature max.                    | 70 °C       |
| Storage temperature min.                      | -30 °C      |
| Storage temperature max.                      | 80 °C       |
| Suitable for installation wall thickness min. | 1 mm        |
| Suitable for installation wall thickness max. | 5 mm        |
| Color cover                                   | transparent |
| Color housing                                 | black       |
| Material lid                                  | PC          |
| Material housing                              | PA          |

#### Germany (VDE)

|                               |                           |
|-------------------------------|---------------------------|
| Connection cross section max. | 2,5 mm <sup>2</sup>       |
| AWG number max.               | 14                        |
| Operating voltage AC          | 250 V                     |
| Operating current             | 16 A                      |
| Connection                    | Spring clamp terminals FK |
| No. of poles                  | 2 + PE                    |
| Connections per pole          | 2                         |
| Protection contact present    | yes                       |