

MSDD pass-through RJ45 CAT5e femal/femal, design black


Neutral lid without logo


Pass-through 1× RJ45, 8-pole CAT5e (female/female)


Link to Product

Illustration






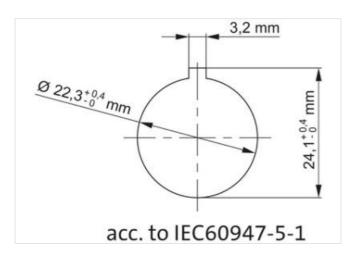


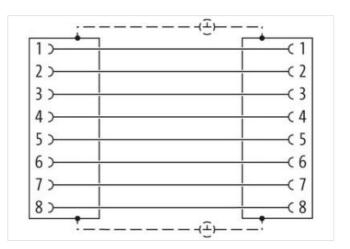



stay connected



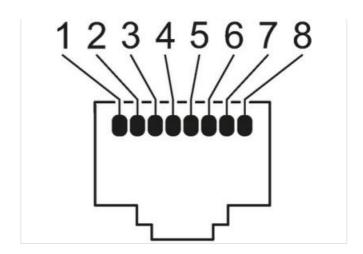

Product may differ from Image







Commercial data	
ECLASS-6.0	27143423
ECLASS-6.1	27143419
ECLASS-7.0	27440515
ECLASS-8.0	27440515
ECLASS-9.0	27440515
ECLASS-10.1	27440515
ECLASS-11.1	27440515
ECLASS-12.0	27440515
ETIM-5.0	EC002625
customs tariff number	85366990
GTIN	4065909035931
Packaging unit	1
Electrical data Supply	
Operating voltage AC	24 V
Operating voltage DC	24 V
Operating current max.	1,5 A
Installation Connection	
Family construction form	RJ46
Gender	female
Gender Rear	female
Cable category min.	Cat5e
Device protection	
Shielded	yes
Device protection Electrical	
Degree of protection (EN IEC 60529)	IP20, IP65
Protection NEMA	2, 3R, 4, 12, 13, 4x
Additional condition protection degree	inserted, in closed state
Device protection Mechanical	
Mechanical endurance	750 Cycles
Mechanical data Mounting data	
Diameter cutout	22,5 mm

The information in this Product-PDF has been compiled with the utmost care. Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2024-05-03



Diameter	29,5 mm	
Mounting depth	70 mm	
Depth	20 mm	
Approvals		
UL 50E	yes	