

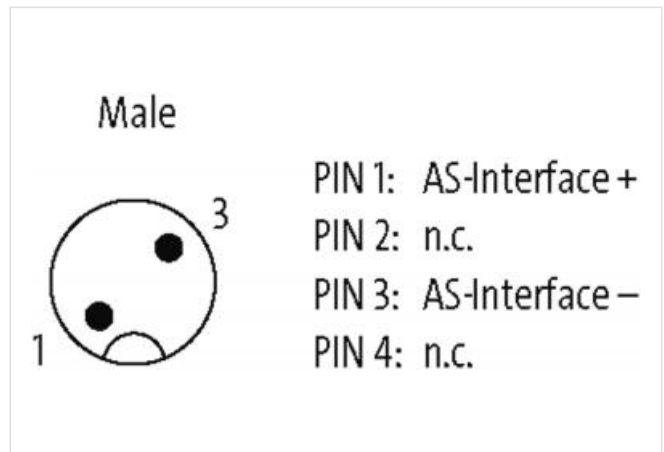
EOL - MODLIGHT70 CONNECTION MODULE 4 POLE M12 BOTTOM EXIT

Product discontinued, no alternative

Basic AB-Slave
4 outputs
for 4 signals
with M12 connection

[Link to Product](#)**Illustration**

Product may differ from Image

**Technical Data**

Bus voltage (AS-Interface)	26.5...31.6 V DC
Total current (AS-Interface)	max. 20 mA
Addressing	via master or M12 connection and programming device
Address range	1...62 (1...31 A or B)
Profile (IO/ID/ID2 code)	S-7.A.7

Output

Supply voltage	via AS-Interface
Switching current per output	max. 60 mA (short-circuit and overload protected)

General data

Protection	IP65 inserted and tightened
Connection	M12 (4-pole)
Housing	Black plastic
Dimensions H×W×D	190×70×70 mm
Temperature range	-30...+60 °C

Commercial data

customs tariff number	85319000
GTIN	4048879030892
Packaging unit	1