
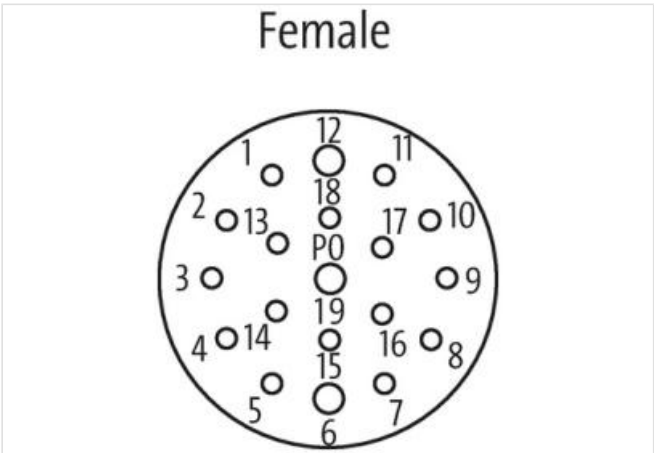
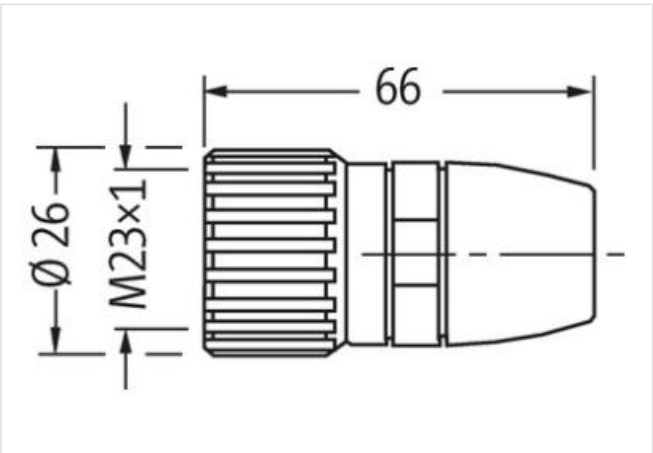


MSCON-C

Female straight  
M23, 19-pole  
Solder connection

Link to Product

Illustration

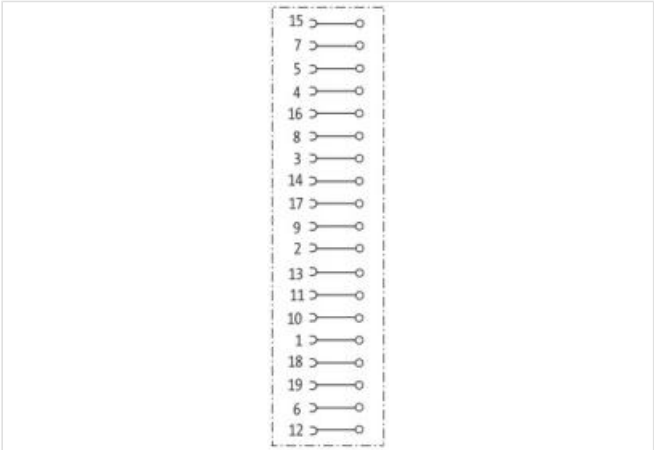

Product may differ from Image

Side 1

Degree of protection (EN IEC 60529) IP67

Commercial data

ECLASS-6.0	27279221
ECLASS-6.1	27260702
ECLASS-7.0	27440102
ECLASS-8.0	27440102
ECLASS-9.0	27440116
ECLASS-10.1	27440102
ECLASS-11.1	27440102
ECLASS-12.0	27440116
ETIM-5.0	EC001855
customs tariff number	85366990
GTIN	4048879187978

Packaging unit 1

**Electrical data | Supply**

Operating voltage AC max. 125 V

Operating voltage DC max. 125 V

Current operating per contact max. 8 A

**Installation**

Connection cross section max. 1 mm<sup>2</sup>

**Installation | Connection**

Connection information Solder buckets

**Device protection | Electrical**

Additional condition protection degree inserted, screwed

**Mechanical data | Mounting data**

Clamping range min. 8 mm

Clamping range max. 14 mm

**Environmental characteristics | Climatic**

Operating temperature min. -25 °C

Operating temperature max. 85 °C

**Important installation notes**

Note on strain relief Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties.

Note on bending radius **Attention:** Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces.