


Double locking lever, top entry M32

Link to Product

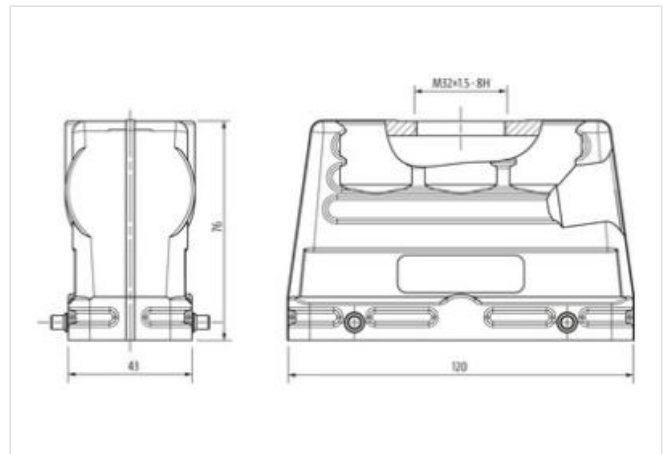

Commercial data

Installation

Installation | Connection

Device protection | Electrical

Mechanical data

The information in this Product-PDF has been compiled with the utmost care.
Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2024-05-21

Murrelektronik Ltd. | 5 Albion Street, Pendlebury Industrial Estate, Swinton | Manchester M27 4FG | Fon +44 161 728 3133 | Fax +44 161 728 3130 | shop@murrelektronik.co.uk | shop.murrelektronik.co.uk

Mechanical data Material data	
Coating housing	powder-coated
Coating locking	verzinkt
Material housing	Aluminum die casting
Locking material	Steel
Mechanical data Mounting data	
Size	B24
Height	76 mm
Width	43 mm
Depth	120 mm
Locking techniques	Double locking lever
Environmental characteristics Climatic	
Operating temperature min.	-40 °C
Operating temperature max.	100 °C
Climatic category (EN IEC 60068-1)	40/100/21