
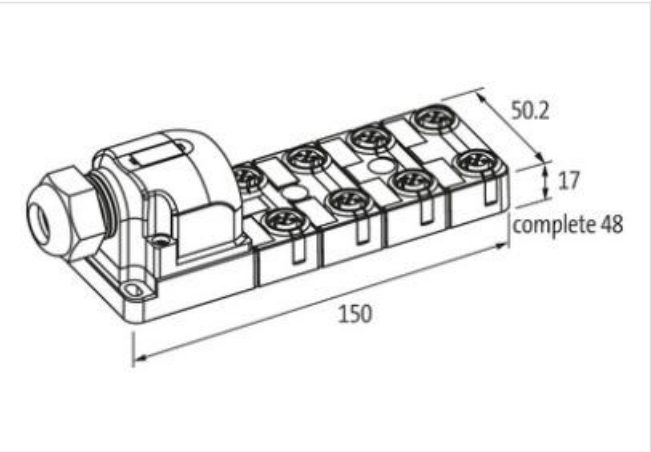


EXACT12, 8XM12, 4 POLE CAP, PLUG. SCREW-TERM.


8-way, 4-pole  
Form PNP  
Screw plug-in terminals  
Plastic housings with good resistance against chemicals and oils.  
The resistance to aggressive media should be individually tested for your application. Further details on request.

Link to Product

Illustration

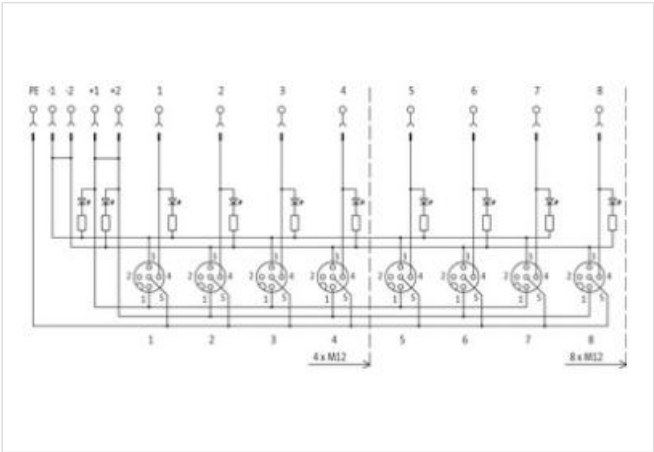

Product may differ from Image

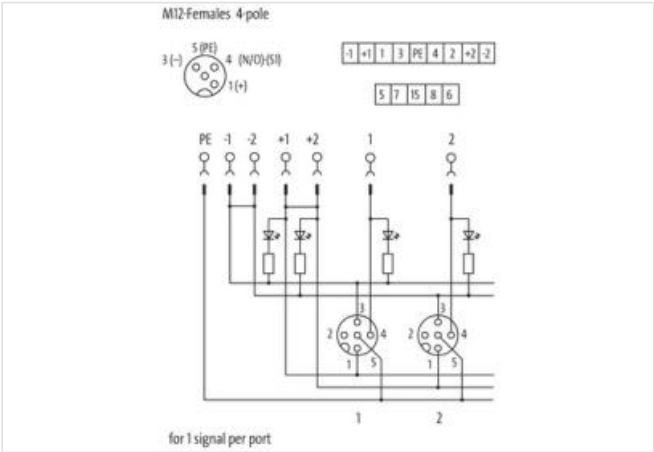

Commercial data

|             |          |
|-------------|----------|
| ECLASS-6.0  | 27143423 |
| ECLASS-6.1  | 27279219 |
| ECLASS-7.0  | 27279219 |
| ECLASS-8.0  | 27279219 |
| ECLASS-9.0  | 27440111 |
| ECLASS-10.1 | 27440111 |

|                       |               |
|-----------------------|---------------|
| ECLASS-11.1           | 27440111      |
| ECLASS-12.0           | 27440111      |
| ETIM-5.0              | EC002585      |
| customs tariff number | 85369010      |
| GTIN                  | 4048879054164 |
| Packaging unit        | 1             |

**Electrical data | Supply**

|                                    |      |
|------------------------------------|------|
| Operating voltage DC               | 24 V |
| Current operating per contact max. | 4 A  |
| Total current max.                 | 8 A  |

**Installation**

|                               |                     |
|-------------------------------|---------------------|
| Connection cross section max. | 1,5 mm <sup>2</sup> |
| AWG number max.               | 16                  |

**Installation | Connection**

|            |                         |
|------------|-------------------------|
| Connection | Screw plug-in terminals |
|------------|-------------------------|

**Device protection | Electrical**

|                                     |            |
|-------------------------------------|------------|
| Degree of protection (EN IEC 60529) | IP65, IP67 |
|-------------------------------------|------------|

**Device protection | Media**

|                  |                 |
|------------------|-----------------|
| Flame resistance | flame retardant |
|------------------|-----------------|

**Mechanical data | Material data**

|                  |         |
|------------------|---------|
| Material housing | Plastic |
|------------------|---------|

**Environmental characteristics | Climatic**

|                            |        |
|----------------------------|--------|
| Operating temperature min. | -20 °C |
| Operating temperature max. | 70 °C  |

**Connection type 2**

|                          |        |
|--------------------------|--------|
| Family construction form | Cap    |
| No. of poles             | 14     |
| Family construction form | M12    |
| Gender                   | female |
| Color contact carrier    | black  |
| Coding                   | A      |
| No. of poles             | 4      |
| PIN 1                    | +      |
| PIN 2                    | n.c.   |
| PIN 3                    | -      |
| PIN 4                    | NO S 1 |
| PIN 5                    | PE     |