



DESINA HYBRID FIELD BUS CABLE

Cu-Cu-cable 2x0.34+4x1,5 violet 35m

DESINA® ECOFAST®  
Male straight – female straight  
6-pole, CU  
shielded  
Further cable lengths on request.  
Han-Brid ® a registered trademark of HARTING KGaA.  
Plastic housings with good resistance against chemicals and oils.  
The resistance to aggressive media should be individually tested for your application. Further details on request.

Link to Product

Illustration

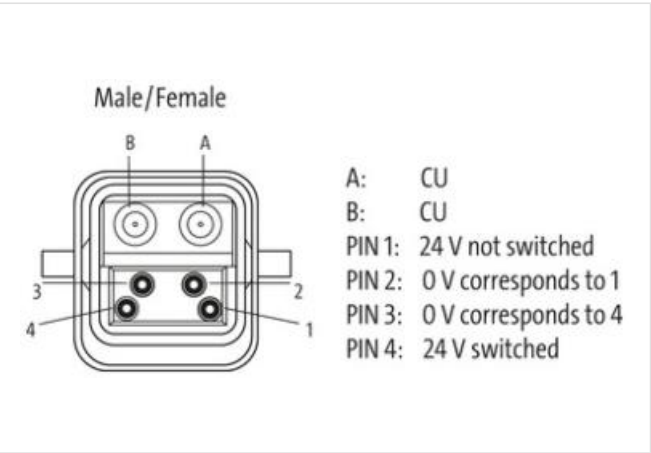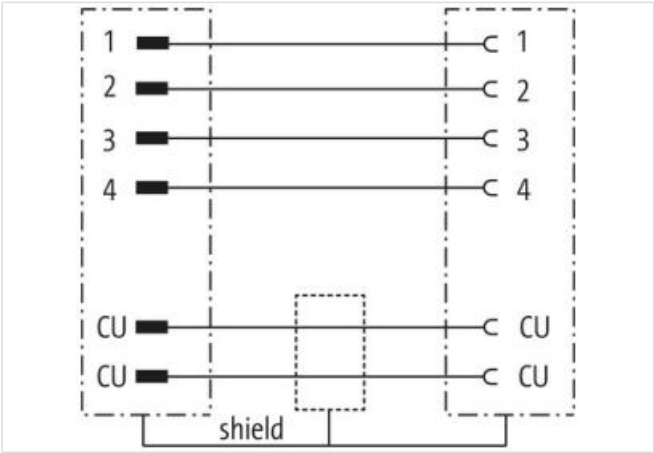

Product may differ from Image

Cable length 35 m

Side 1

Mounting method inserted

Material PC

Degree of protection (EN IEC 60529) IP65

Commercial data

ECLASS-6.0	27279218
ECLASS-7.0	27279218
ECLASS-8.0	27279218
ECLASS-9.0	27060311
ETIM-5.0	EC001855
customs tariff number	85444290
GTIN	4048879492911
Packaging unit	1
<b>Electrical data   Supply</b>	
Operating voltage AC max.	24 V
Operating voltage DC max.	24 V
Current operating per contact max.	10 A
<b>Device protection   Electrical</b>	
Additional condition protection degree	inserted, screwed
<b>Mechanical data   Material data</b>	
Material screw connection	PC
<b>Mechanical data   Mounting data</b>	
Looking techniques	Clip locking
<b>Environmental characteristics   Climatic</b>	
Operating temperature min.	-25 °C
Operating temperature max.	85 °C
Additional condition temperature range	depending on cable quality
<b>Installation   Cable</b>	
Cable identification	964
Jacket Color	violet
wire arrangement	(black 1, black 2, black 3, black 4), (red, green)
Material jacket	PUR
Outer-diameter (jacket)	10 mm
Tolerance outer diameter (sheath)	± 5 %
Material inner jacket	PVC
Material wire insulation	PVC
Amount wires	4
Conductor crosssection (wire)	1,5 mm <sup>2</sup>
Material wire insulation (Data)	PVC
Amount wires (Data)	2
Conductor crosssection wire (Data)	0,34 mm <sup>2</sup>
Min. operating temperature (static)	-30 °C
Max. operating temperature (fixed)	70 °C
Operating temperature min. (dynamic)	-40 °C
Operating temperature max. (dynamic)	60 °C
Flame resistance	IEC 60332-2-2   UL 1581 § 1100 FT2   UL 1581 § 1090
chemical resistance	Good, application-related testing
Gasoline resistance	Good, application-related testing
Oil resistance	Good, application-related testing   DIN EN 60811-404
Bending radius (dynamic)	8 x Outer diameter