

**CUBE67+ BUS NODE**

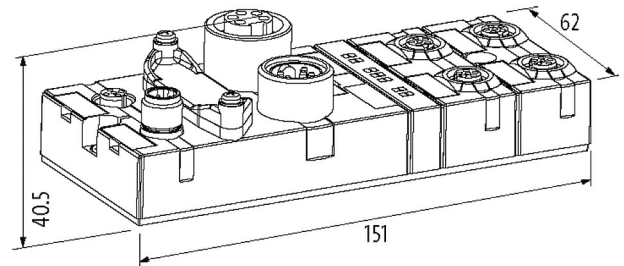
ProfiNet IO

Cube67+  
PROFINET IO

Connection cables are in the online shop under "Connection Technology".

Housing fully potted.

Cube67+ modules can only be operated on Cube67+, EtherNet/IP, PROFIBUS + PROFINET bus nodes.

**Link to Product****Illustration**

Product may differ from Image

**Approvals****More Info****General data**

Mounting method	2-hole screw mounting
Temperature range	0...+55 °C (storage temperature -20...+75 °C)
Protection	IP67
Dimensions H×W×D	151×62×40.5 mm

**Module supply**

Operating voltage	24 V DC (EN 61131-2)
Current consumption	max. 200 mA

**Cube system**

Module capacity	max. 32
Machine Option Management	yes
No. of masterports (IO-Link)	max. 128
I/O capacity	max. 1 024 Byte (Input), max. 1 024 Byte (Output)

**Connections**

Fieldbus	Ethernet 10/100 Mbit/s; M12, D-coded
Sensor-system/actuator supply	7/8", 5-pole, 2× max. 8 A
Internal system connection	4× M12 (female) A-coded, 6-pole, 2× max. 4 A

**PROFINET**

Specification	V2.2, Conformance Class B
---------------	---------------------------

Addressing DCP

**Diagnostic**

Communication status	via LED and BUS
Diagnostic via LED	per module and channel
Diagnostic via BUS	per module and channel
Monitoring - under voltage	yes
Monitoring - no voltage	yes
Short-circuit and overload	yes

**Commercial data**

country of origin	DE
customs tariff number	85389099
EAN	4048879294027
eClass	27242608
Packaging unit	1.000