



M12 female 90° A-cod. IDC

4-pol., 0,25 - 0,5mm², 4 - 5,1mm

Female 90°
M12, 4-pole
IDC terminals
Connection cross section: 0.25...0.5 mm²
Tube adapter
Art-No. 7005 - M12 Lite - (plastic hexagonal screw) on request
The resistance to aggressive media should be individually tested for your application. Further details on request.

Link to Product

Illustration

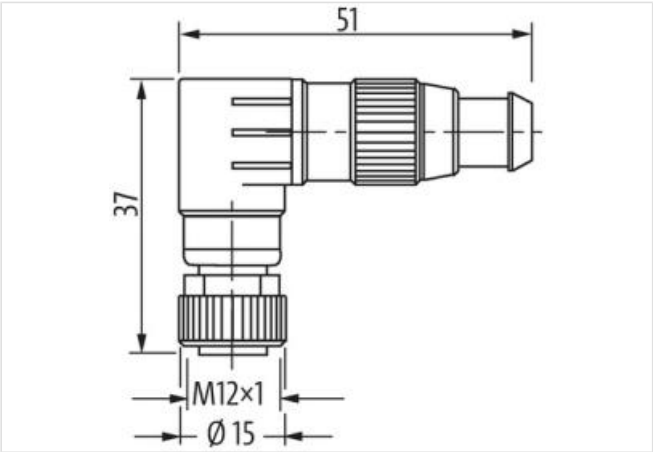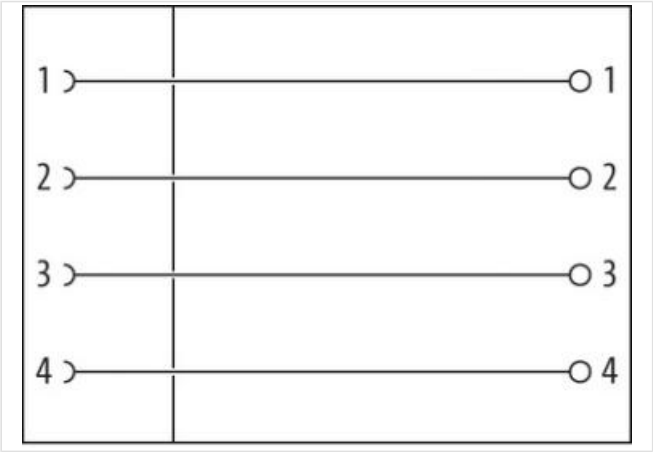

Product may differ from Image

Side 1

| | |
|-------------------------------------|------|
| Family construction form | M12 |
| Degree of protection (EN IEC 60529) | IP67 |

Commercial data

| | |
|------------|----------|
| ECLASS-6.0 | 27279221 |
| ECLASS-6.1 | 27260702 |
| ECLASS-7.0 | 27440102 |
| ECLASS-8.0 | 27440102 |

| | |
|-----------------------|---------------|
| ECLASS-9.0 | 27440116 |
| ECLASS-10.1 | 27440102 |
| ECLASS-11.1 | 27440102 |
| ECLASS-12.0 | 27440116 |
| ETIM-5.0 | EC002635 |
| customs tariff number | 85366990 |
| GTIN | 4048879300179 |
| Packaging unit | 1 |

Electrical data | Supply

| | |
|------------------------------------|------|
| Operating voltage AC max. | 32 V |
| Operating voltage DC max. | 32 V |
| Current operating per contact max. | 4 A |

Installation

| | |
|-------------------------------|----------------------|
| Connection cross section min. | 0,25 mm ² |
| Connection cross section max. | 0,5 mm ² |
| Single wire diameter min. | 0,1 mm |

Installation | Connection

| | |
|-------------------------------|--------|
| Wire insulation diameter min. | 1,2 mm |
| Wire insulation diameter max. | 1,6 mm |
| Tightening torque | 0,6 Nm |

Device protection | Electrical

| | |
|--|-------------------|
| Additional condition protection degree | inserted, screwed |
|--|-------------------|

Mechanical data | Material data

| | |
|------------------|------------------|
| Coating locking | Nickeled |
| Locking material | Zinc die-casting |

Mechanical data | Mounting data

| | |
|---------------------|---------------------------------------|
| Mounting method | inserted, screwed, Shaking protection |
| Clamping range min. | 4 mm |
| Clamping range max. | 5,1 mm |

Environmental characteristics | Climatic

| | |
|----------------------------|--------|
| Operating temperature min. | -25 °C |
| Operating temperature max. | 85 °C |

Important installation notes

| | |
|------------------------|---|
| Note on strain relief | Protect the connectors by suitable measures from mechanical loads, e.g. by the usage of cable ties. |
| Note on bending radius | Attention: Observe the permissible bending radii when laying cables, as the IP protection class can be endangered by excessive bending forces. |