

Wall bushing for push pull power

With spring-cage connection, flexible coding


Push Pull Power metal mounting frame
incl. contact insert with spring clamp connection
flexible coding
Suitable for rectangular mounting cut-out
with gasket
without fixing screws

Link to Product

Illustration



Product may differ from Image

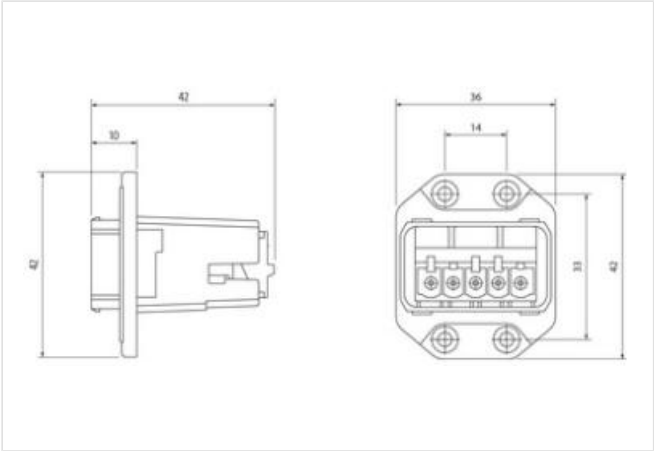

Commercial data

ECLASS-6.0	27279221
ECLASS-7.0	27440104
ECLASS-8.0	27440104
ECLASS-9.0	27440102
ECLASS-10.1	27440210
ECLASS-11.1	27440210
ECLASS-12.0	27440210
ETIM-5.0	EC002635
customs tariff number	85366990
GTIN	4048879900454
Packaging unit	1

Electrical data | Supply

Operating voltage DC	24 V
Operating current	16 A

Installation

Connection cross section min.	0,75 mm²
Connection cross section max.	2,5 mm²
AWG number min.	18

AWG number max. 13

Installation | Connection

Connection Spring clamp terminals FK
Mating cycles min. 100

Device protection | Electrical

Degree of protection (EN IEC 60529) IP65, IP67
Additional condition protection degree inserted, screwed
Pollution Degree 2
Rated surge voltage 4 kV

Mechanical data | Material data

Coating housing nickel plated
Combustibility class (UL94) V-0
Material housing Zinc die-casting

Mechanical data | Mounting data

Mounting method 5-pole, PPP

Environmental characteristics | Climatic

Operating temperature min. -40 °C
Operating temperature max. 70 °C